

DATE : _____ RACE : _____ NAME : _____

LOCATION : _____ LAPS : _____ BEST LAP TIME : _____ QUALIF. POSITION : _____ FINAL POSITION : _____

TRACK CONDITION

Type : ☒ Outdoor ☐ Semi-open ☐ Indoor
 Surface : ☐ Astro ☒ Clay ☐ Hard Track
☐ Flat ☒ Medium ☐ Bumpy
 Grip : ☒ Low ☐ Medium ☐ High

ELECTRONICS - TRANSMISSION

ESC : CMM-8
 Motor : Pista 805 1950KV
 Pinion : 16T
 Spur Gear : 46T

BATTERY

Type : Corally 120C
 Capacity : 6750
 Weight : _____
 Connect : _____

DIFFERENTIALS

☒ Oil ☐ Grease
 Front : 10 000
 Centre : 20 000
 Rear : 5 000

TYRE

Foam FR : CAPTIC
 Tyre FR : ZONDA
 Foam RE : CAPTIC
 Tyre RE : ZONDA

FRONT SUSPENSION

Shock absorber

SPRING

Type : Stock

Height : _____



CAP version
☒ Bladder
☐ Emulsion

mm

Piston: 6x1,3

Oil: 45 WT

Suspension Arm Cover

FRONT

☐ Graphite
☒ Composite

Camber Angle

LEFT (°): _____


RIGHT (°): _____

Front Ride Height

Chassis Front
 23 mm


Front Toe-In

Insert value : ☐ 0.5 ☒ 1.0




Front Roll Centre

☒ Graphite
☐ Aluminium

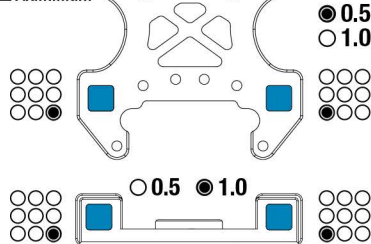


Steering Rack - Ackerman




Front Suspension

Drive Shaft : ☐ CVD ☒ Universal




Shim 0 mm

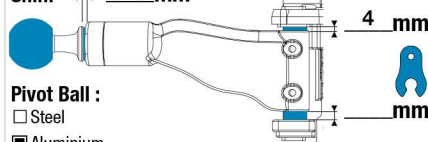

Pivot Ball :

☐ Steel
☒ Aluminium

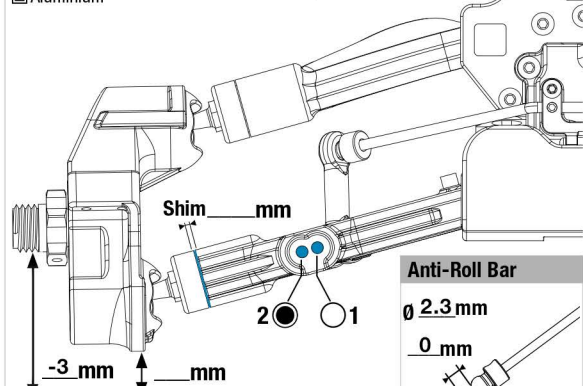

Anti-Roll Bar

ø 2.3 mm

0 mm

REAR SUSPENSION

Shock absorber

SPRING

Type : Stock

Height : _____



CAP version
☒ Bladder
☐ Emulsion

mm

Piston: 6x1,4

Oil: 40 WT

Suspension Arm Cover

REAR

☐ Graphite
☒ Composite

Camber Angle

LEFT (°): _____


RIGHT (°): _____

Rear Ride Height

Chassis Rear
 27 mm


Rear Toe-In

Insert value : ☐ 0.5 ☒ 1.0

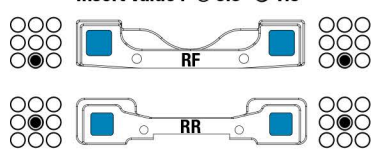


Rear Shocktower


☒ Graphite
☐ Aluminium

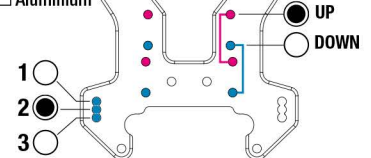

Wing Position

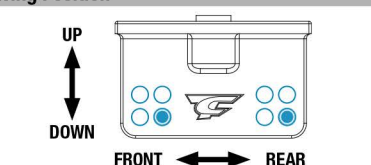

Rear Suspension

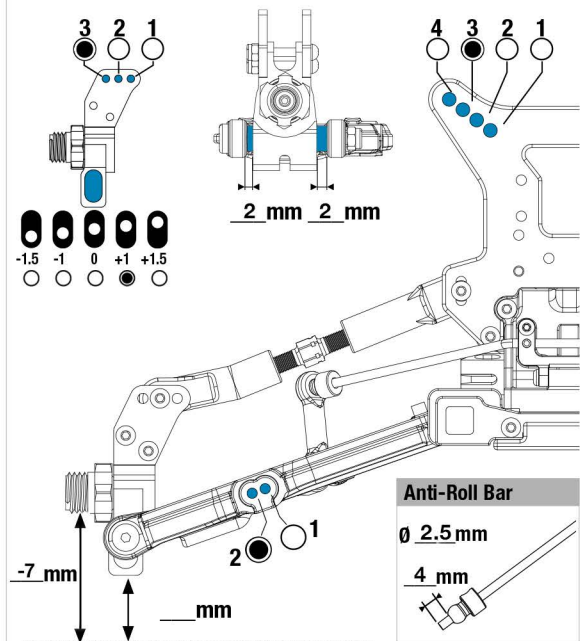

Anti-Roll Bar

ø 2.5 mm


4 mm

Notes


Wing Position

Wing Type : JCONCEPT Material : _____

Wing Blade : ☐ Yes ☐ No



Chassis - Side Guard



Body

Type : Stock

Thickness : _____ mm

