


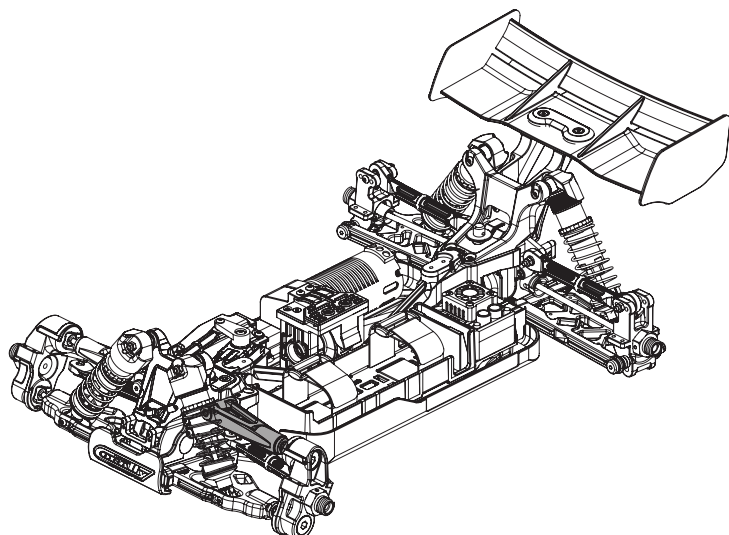

Required Tools:

- 1.5 Hex Driver
- 2.0 Hex Driver
- 2.5 Hex Driver
- Thread-locker 

STEP 1

BH M3x10
C-3003-30-10



L=R

STEP 2

C-00180-109 (set)

Set Screw M3x4
C-3004-30-04

C-00180-127

C-00180-011

L=R