


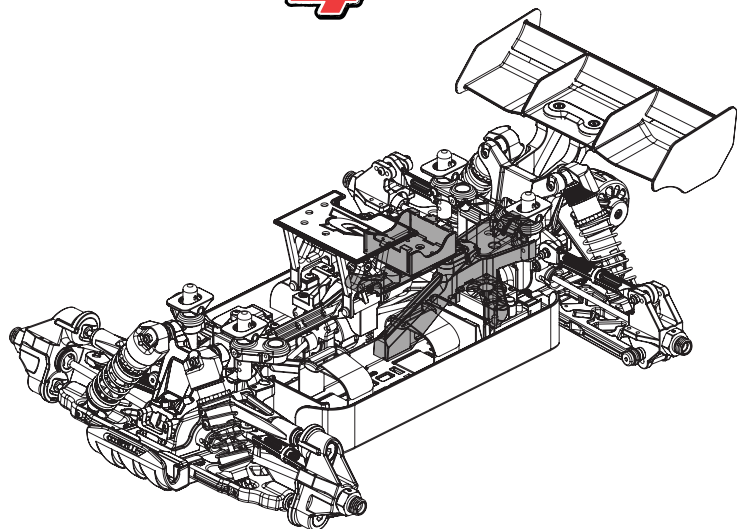

Required Tools:

- 2.0 Hex Driver
- 2.5 Hex Driver

Important Notice:

Wing is not shown for clarity.

STEP 1

FH M4x16 C-3002-40-16

FH M4x20 C-3002-40-20

FH M3x8 C-3002-30-08

M3 Washer C-3213-30-5

FH M3x18 C-3002-30-18

C-00180-1313

BH M3x12 C-3003-30-12

STEP 2

BH M3x14 C-3003-30-14

BH M4x25 C-3003-40-25

C-00180-835

STEP 3

BH M3x30 C-3003-30-30

STEP 4



Wheel must be removed if you're using standard tools, but with a ball tip 2mm screwdriver, you do not have to remove the wheel.

BH M3x12 C-3003-30-12

STEP 5

BH M3x18 C-3003-30-18

C-00180-1314

BH M3x16 C-3003-30-16

STEP 6

BH M3x10 C-3003-30-10

FH M3x12 C-3002-30-12

C-00180-1311 (set)

C-00180-990

BH M4x25 C-3003-40-25