

DATE : _____ RACE : _____ NAME : _____

LOCATION : _____ LAPS : _____ BEST LAP TIME : _____ QUALIF. POSITION : _____ FINAL POSITION : _____

TRACK CONDITION

Type : ☒ Outdoor ☐ Semi-open ☐ Indoor
 Surface : ☐ Astro ☐ Clay ☐ Hard Track
☐ Flat ☒ Medium ☐ Bumpy
 Grip : ☒ Low ☐ Medium ☐ High

ELECTRONICS - TRANSMISSION

ESC : CMM-8
 Motor : Rycon
 Pinion : _____
 Spur Gear : 46T

BATTERY

Type : _____
 Capacity : _____
 Weight : _____
 Connect : _____

DIFFERENTIALS

☒ Oil ☐ Grease
 Front : 10 000
 Centre : 20 000
 Rear : 5 000

TYRE

Foam FR : _____
 Tyre FR : _____
 Foam RE : _____
 Tyre RE : _____


FRONT SUSPENSION

Shock absorber

SPRING

Type : Stock

Height : _____



Piston: 6x13

Oil: 45

Suspension Arm Cover

FRONT


☒ Graphite
☐ Composite

Camber Angle

LEFT (°): _____


RIGHT (°): _____

Front Ride Height




Front Toe-In

Insert value : ☐ 0.5 ☒ 1.0




Front Roll Centre

☐ Graphite
☒ Aluminium

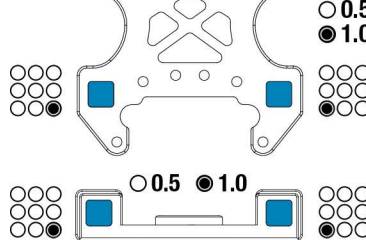


Steering Rack - Ackerman




Front Suspension

Drive Shaft : ☐ CVD ☒ Universal

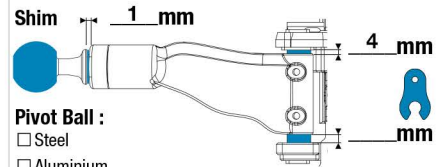

Pivot Ball :

☐ Steel
☐ Aluminium

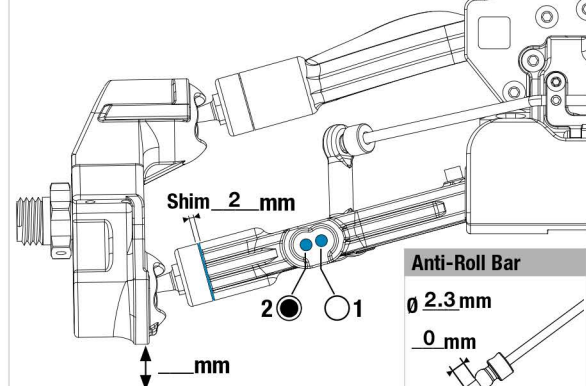

Anti-Roll Bar

ø 2.3 mm

0 mm


REAR SUSPENSION

Shock absorber

SPRING

Type : Stock

Height : _____



Piston: 6x14

Oil: 40

Suspension Arm Cover

REAR


☒ Graphite
☐ Composite

Camber Angle

LEFT (°): _____


RIGHT (°): _____

Rear Ride Height




Rear Toe-In

Insert value : ☐ 0.5 ☒ 1.0

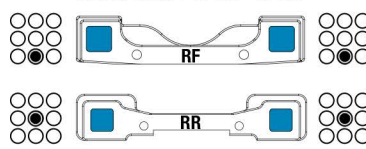


Rear Shocktower


☐ Graphite
☒ Aluminium

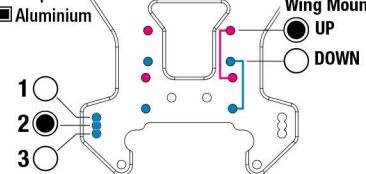

Wing Position



Rear Suspension

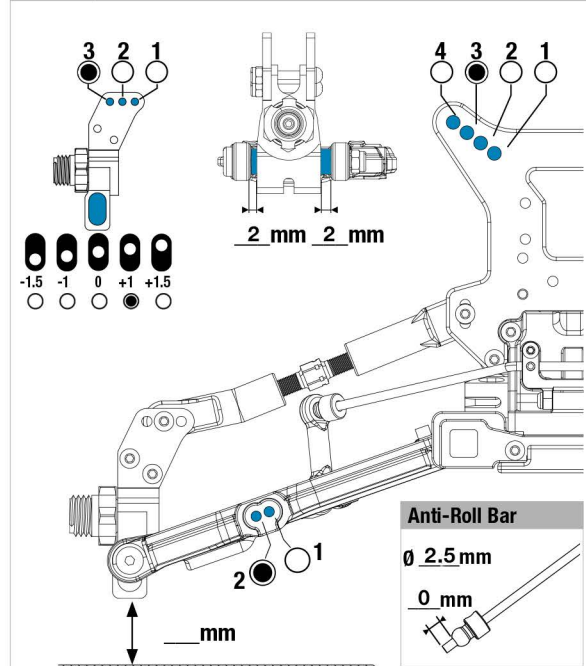

Anti-Roll Bar

ø 2.5 mm


0 mm

Notes


Wing Position

Wing Type : _____ Material : _____

Wing Blade : ☐ Yes ☐ No



Chassis - Side Guard



Body

Type : Stock

Thickness : _____ mm

