


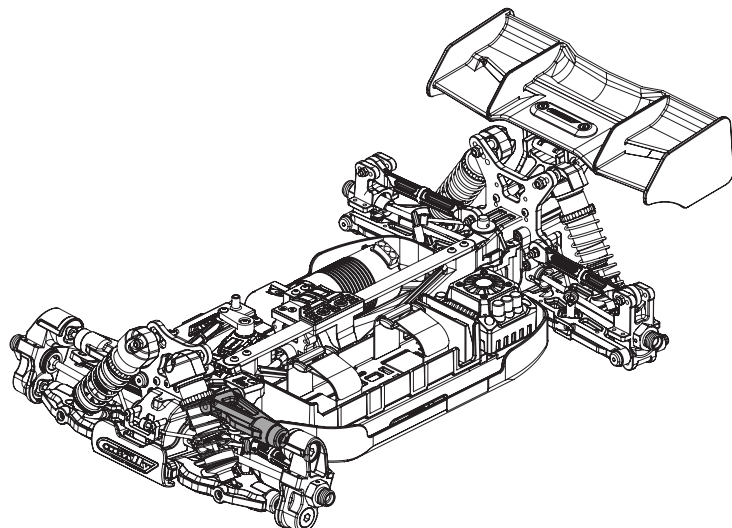

Required Tools:

- 1.5 Hex Driver
- 2.0 Hex Driver
- 2.5 Hex Driver
- Thread-locker 

STEP 1

BH M3x10
C-3003-30-10

L=R

STEP 2

C-00180-891

Set Screw M3x5
C-3004-30-05

C-00180-055 (set)

C-00180-936

C-00180-532

L=R