


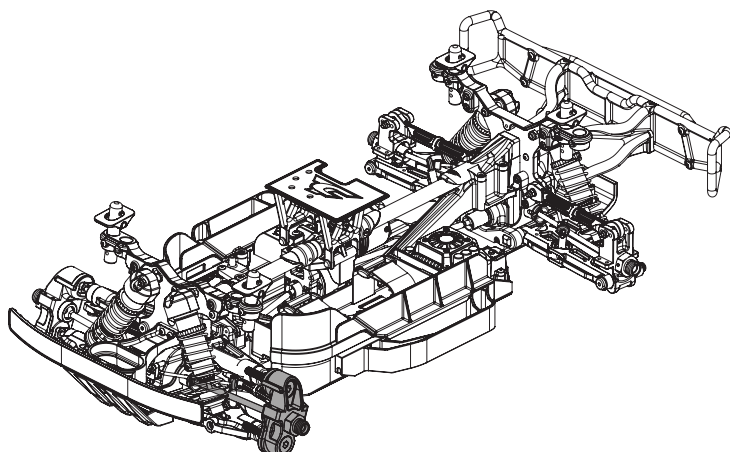


Required Tools:

- 2.0 Hex Driver
- 2.5 Hex Driver
- 3.0 Hex Driver
- 17mm Wheel Nutdriver
- Thread-locker
- Lithium Grease
- Graphite Pencil
- Hobby Knife or Other Sharp Tool

STEP 1


BH M3x10
C-3003-30-10

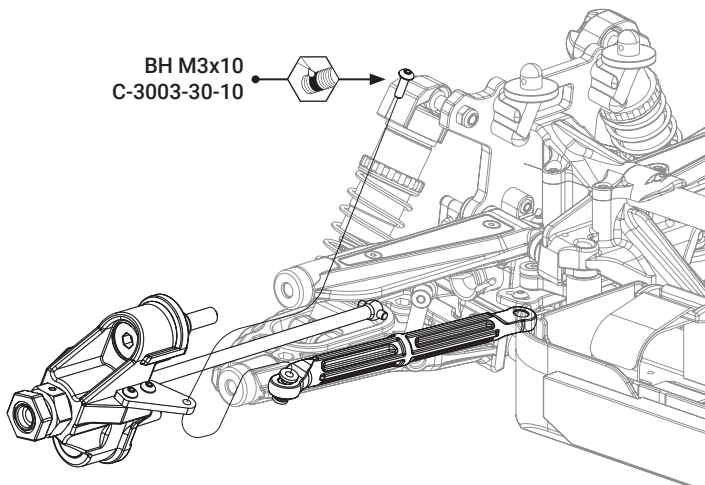

L=R

STEP 2

C-00180-117
C-00180-123
C-00180-009-1 (set)

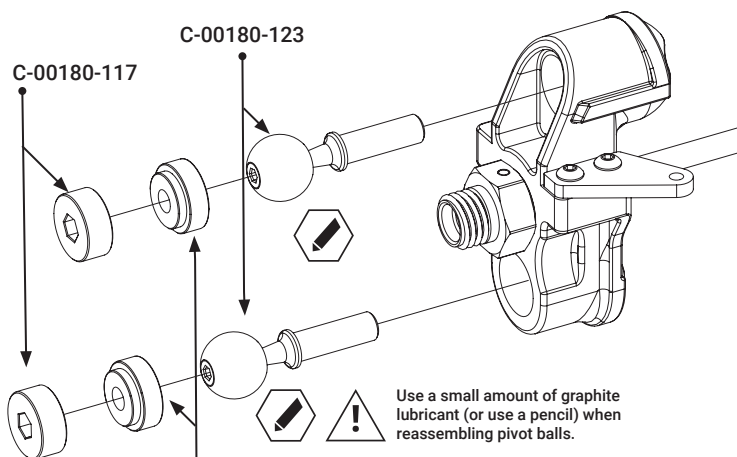


Use a small amount of graphite lubricant (or use a pencil) when reassembling pivot balls.

L=R

STEP 3

BH M3x12
C-3003-30-12


C-00180-207

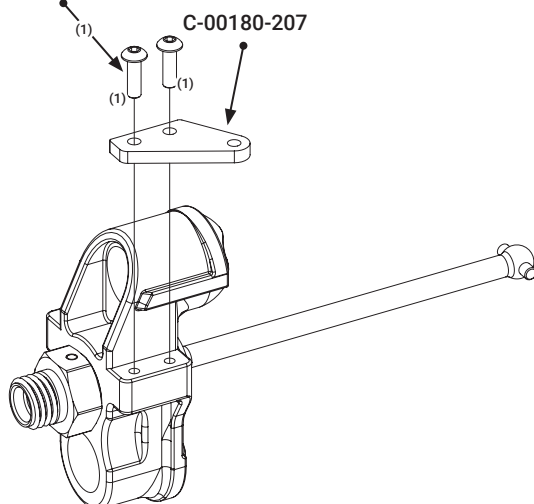

L=R

STEP 4

C-00180-329-B
C-00180-122
BB 8x16x5
C-3611-3-08-16-05
C-00180-360
BB 8x16x5
C-3611-3-08-16-05
Set Screw M4x4
C-3004-40-04
C-00180-009-1 (set)

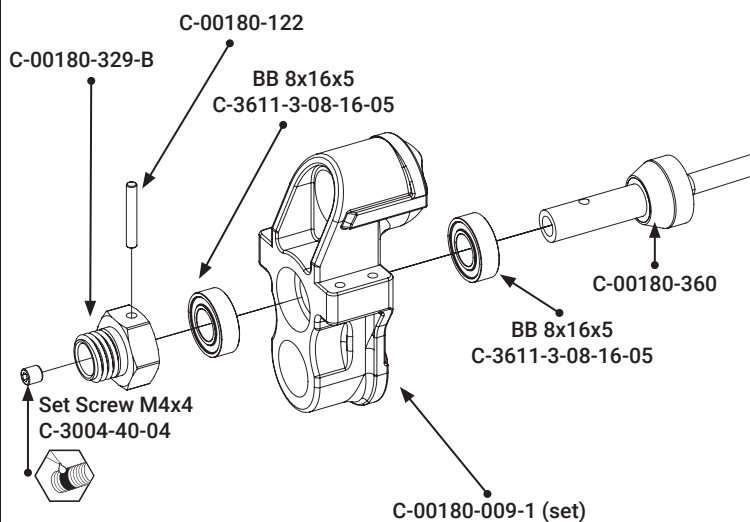

L=R