

Use the correct grade of silicone oil (Factory 10.000cps) according to the operation.

Use only Silicone Oil, never use any other types of oil

Required Tools:

- 2.0 Hex Driver
- Silicone Diff Oil 
- Paper Towel
- Solvent/Brake Cleaner
- Hobby Knife or Other Sharp Tool
- Pliers


Finish Before:

- Front Diff Removal or Rear Diff Removal


Important Notice:

Do NOT use solvents on rubber gaskets or O-rings to prevent damage.


STEP 1

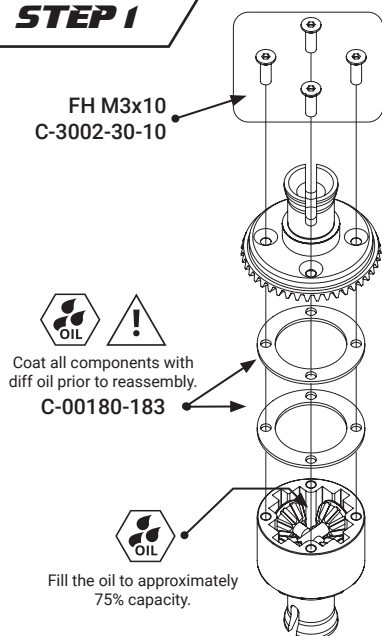


STEP 2

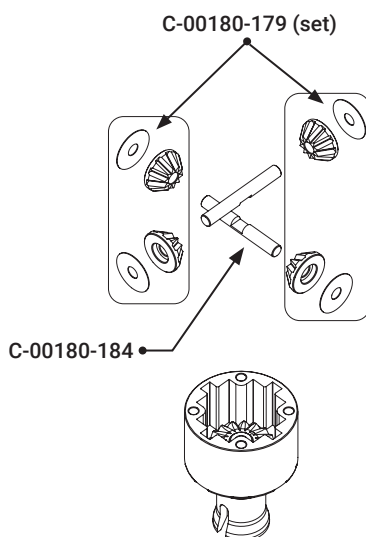


STEP 3

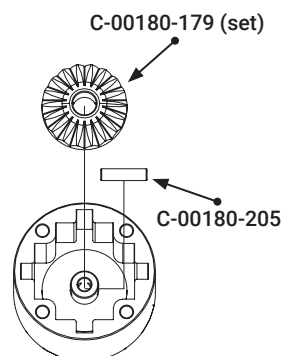

STEP 4

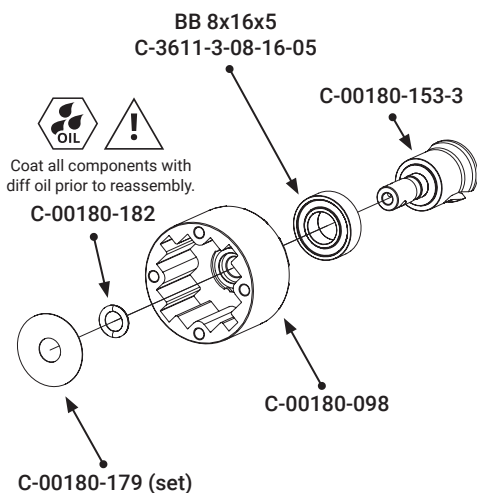

STEP 5

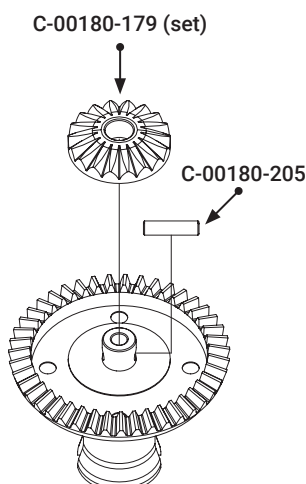

STEP 6

