

Date	Track Composition: Size: ☐ Open ☐ Mixed ☐ Tight Traction: ☐ High ☐ Medium ☐ Low Surface: ☐ Smooth ☐ Both ☐ Bumpy
Driver	

Engine	Plug	Muffler	Clutch Spring	Clutch Shoe	Tire	Tire Insert	Wheel	Body	Fuel
			φ ____ x ____		Model :				
					Compounds:				

Diff Gear Set-Up

	Front	Center	Rear
Diff. Fluid	#	#	#
	____ x ____ T	____ x ____ T	____ x ____ T

Shock Set-Up

Cap ☐ Bladder ☐ Emulsion	Front	Rear
Oil Brand: _____	#	#
Spring Collar Spacer	mm	mm
Pistons	φ ____ x ____	φ ____ x ____
Spring		

Ride Height


Front	Rear
mm	mm

Rebound

Front	Rear
mm	mm

Camber Angle


Front	Rear
+ °	+ °
- °	- °

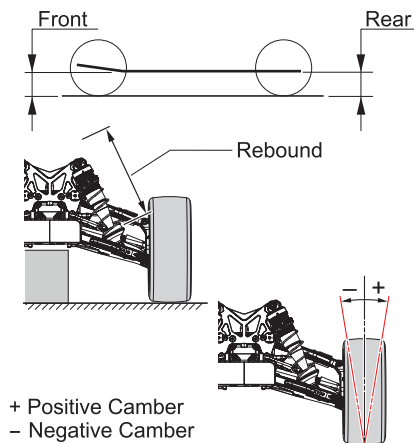


Wheelbase _____ mm

Track Width _____ mm

Shock Mount Position



Rear Upper Arm Position



Sus. Arm


Front	☐ In ☐ Out
Rear	☐ In ☐ Out

Rear Hub

☐ Plastic
☐ Aluminum

Hub Carrier Bush
☐ Plastic
☐ _____

☐ ☐ ☐ ☐
☐ ☐ ☐ ☐

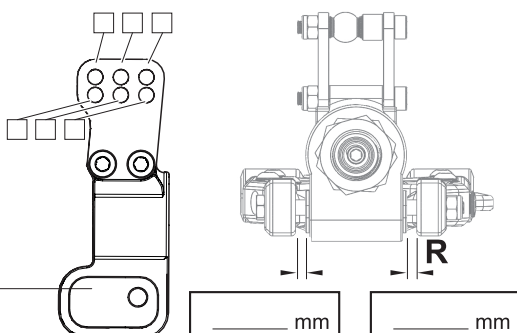



Arm

Front	Rear
☐ Soft	☐ Soft
☐ Hard (Std.)	☐ Hard (Std.)
☐ _____	☐ _____

Front Hub Carrier


☐ Plastic	☐ Aluminum
☐ 16°	☐ 20° ☐ _____°

Front Upper Arm Position

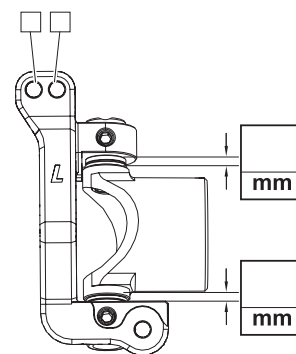

Toe Angle

Front	
+	°
-	°

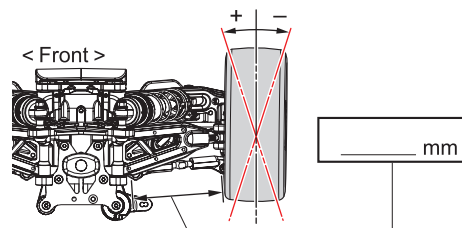


Front Toe-In

FF	☐ ☐ ☐ ☐	FR	☐ ☐ ☐ ☐
----	---	----	---

Rear Toe-In

RF	☐ ☐ ☐ ☐	RR	☐ ☐ ☐ ☐
----	---	----	---

Steering Plate



Sway Bar

Front	Rear
φ	φ
mm	mm

Wing

☐ High Force	☐ ☐ ☐
☐ Holes	☐ ☐ ☐
☐ Without	☐ ☐ ☐

Wing Position / Angle

☐ H	☐ 0°
☐ M	☐ +1.5°
☐ L	☐ +3°

Notes