


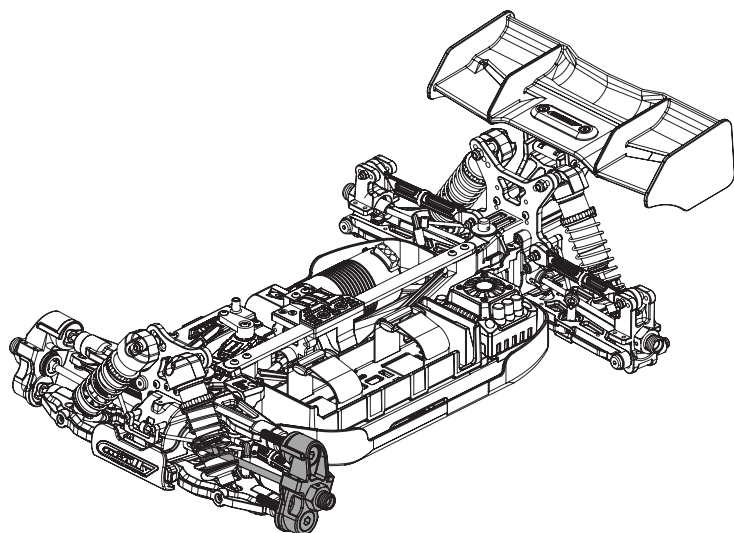

Required Tools:

- 2.0 Hex Driver
- 2.5 Hex Driver
- 17mm Wheel Nutdriver
- Thread-locker
- Lithium Grease
- Graphite Pencil
- Hobby Knife or Other Sharp Tool

STEP 1

BH M3x10
C-3003-30-10

L=R

STEP 2

C-00180-117
C-00180-123
C-00180-009-1 (set)

L=R

Use a small amount of graphite lubricant (or use a pencil) when reassembling pivot balls.

STEP 3

BH M3x12
C-3003-30-12

C-00180-207

L=R

STEP 4

C-00180-329
C-00180-122
BB 8x16x5
C-3611-3-08-16-05

Set Screw M4x4
C-3004-40-04

L=R

C-00180-009-1 (set)

STEP 5



Use a small amount of lithium grease when reassembling driveshafts.

C-00180-360

L=R