







1

Select which pair of holes to drill

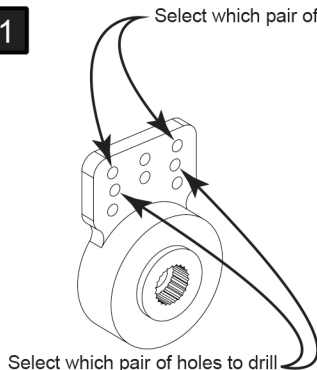

2

Removed shaded area to separate the parts



3

Support may be placed on the front of the horn or on the back of the horn see **STEP 4**

(The ball studs and nuts are not supplied)

