


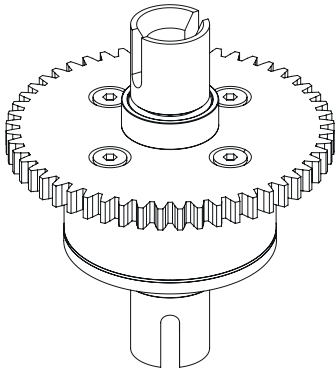

	FRONT DIFF	CENTRE DIFF	REAR DIFF
TRACK USE	100.000cps	100.000cps	50.000cps
OFF ROAD	10.000cps	10.000cps	7.500cps
FACTORY	30.000cps	100.000cps	20.000cps

Required Tools:

- 2.0 Hex Driver
- Silicone Diff Oil
- Thread-locker
- Paper Towel
- Solvent/Brake Cleaner
- Hobby Knife or Other Sharp Tool
- Pliers

Finish Before:

- Center Gearbox


Important Notice:

Do NOT use solvents on rubber gaskets or O-rings to prevent damage.




VIDEO MANUAL
ON YOUTUBE


STEP 1

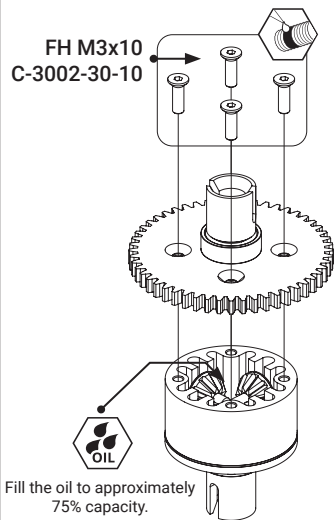


STEP 2

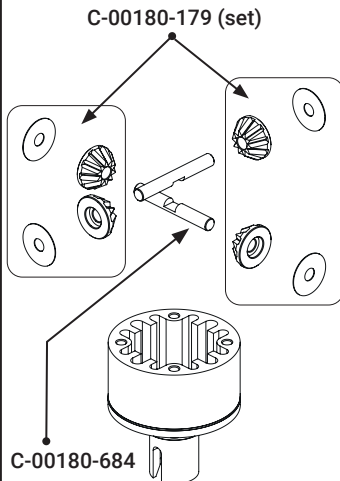


STEP 3

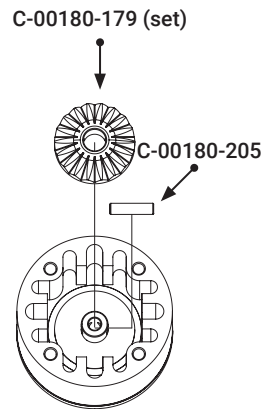


STEP 4

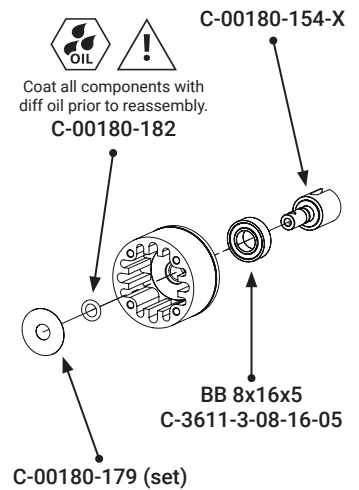

OPTIONAL

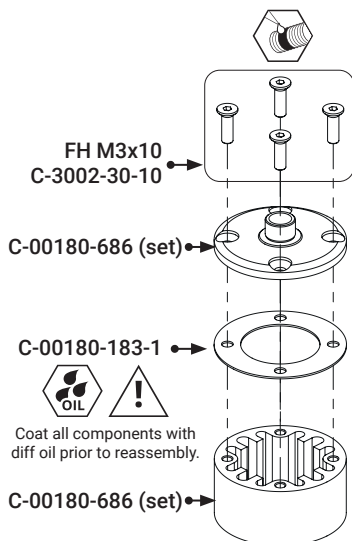

STEP 5

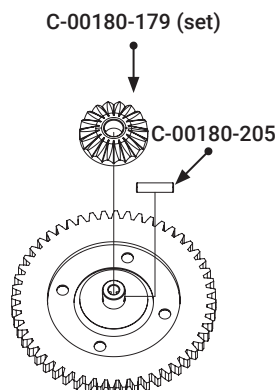

STEP 6

