

# TRAIL PROVEN OFF-ROAD PERFORMANCE

# SCX10™

SCX10™ DEADBOLT™  
1/10th SCALE ELECTRIC 4WD RTR



 **axial**®  
[www.axialracing.com](http://www.axialracing.com)



## CAUTIONS



To prevent serious personal injury and/or property damage, operate all remotely controlled models in a responsible manner as outlined herein.

### CHOOSE THE RIGHT PLACE TO OPERATE YOUR R/C MODEL.

- Do not run on public streets or highways. This could cause serious accidents, personal injuries, and/or property damage.
- Never run R/C models near people or animals.
- To avoid injury, do not run in confined spaces.
- Do not run where loud noises can disturb others, such as hospitals and residential areas.
- Never run indoors. There is a high risk of fire and/or damage.

### INSPECT YOUR MODEL BEFORE OPERATION.

- Make sure that all screws and nuts are properly tightened. It is also a good idea to use removable thread lock wherever metal screws go into metal, especially for engine mounts and the engine pilot shaft.
- Always use fresh batteries for your transmitter and for your receiver to avoid losing control of the model.
- Always test the brakes and throttle before starting your engine to avoid losing control of the model.

### AFTER OPERATION OF YOUR R/C MODEL

- Turn off receiver first, then turn off transmitter, this will prevent runaways.
- Be careful when handling batteries, they will be hot after running.
- Replace any batteries that have been dented or have frayed wires, short circuits can cause fire.
- Be sure to keep your R/C model clean and free of excess dirt and grease, this will increase the life.

## VORSICHT!



Um Verletzungen an Personen und/oder Sachschäden zu vermeiden, sollten alle ferngesteuerten Modelle sorgfältig und verantwortungsbewusst bedient werden, wie nachfolgend beschrieben.

### Wählen Sie den richtigen Platz zum Fahren

- Fahren Sie niemals auf öffentlichen Straßen. Dies könnte Verkehrsunfälle, Personen schäden oder Sachschäden verursachen.
- Fahren Sie niemals in der Nähe von anderen Personen oder Tieren.
- Fahren Sie niemals auf belebten Straßen.
- Fahren Sie nie in der Nähe von Wohnhäusern oder Krankenhäusern. Der Lärm könnte andere Personen stören.
- Fahren Sie niemals in Innenräumen. Dort könnte etwas beschädigt werden.

### Überprüfen Sie Ihr Modell, bevor Sie es in Betrieb nehmen.

- Gehen Sie sicher, dass alle Schrauben und Muttern festgezogen sind. Verwenden Sie überall dort Schrauben-Sicherungslack, wo Metallschrauben in ein Metallgewinde greifen, besonders bei den Motorhaltern.
- Um Störungen zu vermeiden, benutzen Sie immer voll geladene Akkus in Ihrem Sender und Empfänger.
- Bevor Sie den Motor starten, sollten Sie immer die Funktion der Bremse und des Gashebels testen.

### Nach Betrieb des RC Modells:

- Zuerst den Empfänger abdrehen, dann den Sender abdrehen um unkontrolliertes Durchgehen zu vermeiden.
- Seien Sie vorsichtig mit gebrauchten Akkus, sie können nach dem Gebrauch heiß sein.
- Ersetzen Sie Akkus/Batterien die beschädigt sind oder schadhafte Kabel aufweisen, sie können Kurzschlüsse oder Feuer verursachen.
- Halten Sie Ihr Fahrzeug sauber und entfernen Sie Schmutz und Schmierfett, damit erhöhen Sie die Lebensdauer Ihres Modells.

## PRECAUTIONS



Afin d'éviter toutes blessures corporelles et/ou dommages environnants, veuillez procéder en toute responsabilité comme indiqué ci-dessous

### Choisir le lieu adéquat pour faire rouler votre modèle.

- Ne jamais rouler dans les rues ou sur les routes ouvertes au public. Ceci peut provoquer de graves accidents.
- Ne jamais rouler près de personnes ou d'animaux.
- Pour éviter les blessures, ne pas rouler dans des espaces confinés.
- Ne jamais rouler où le bruit peut déranger, comme aux abords des hôpitaux ou des quartiers résidentiels.
- Ne jamais rouler à l'intérieur: les gaz d'échappement sont nocifs.

### Contrôler votre modèle avant chaque utilisation.


- Vérifier que les vis et les écrous sont bien serrés. Il est très fortement conseillé d'utiliser du frein filet pour bloquer les vis qui sont en contact avec du métal et tout particulièrement les vis du moteur.
- Toujours utiliser des batteries bien chargées pour l'émission et la réception.
- Toujours vérifier les freins et la commande des gaz avant de démarrer.

### Après l'Opération De Votre Modèle de R/C



- Le virage du récepteur premier, alors virage de l'émetteur, ceci empêchera des fugitifs.
- Faire attention en contrôlant des piles, ils auront chaud après avoir couru.
- Remplacer n'importe quelles piles qui ont été cabossées ou a éraillé des fils, les court-circuits peuvent causer le feu.
- Etre sûr de garder votre modèle de R/C nettoie et libère de terre et la graisse suppléments, ceci augmentera la vie.



Radio control car  
Ferngesteuertes Modellauto  
Voiture radio-commandée

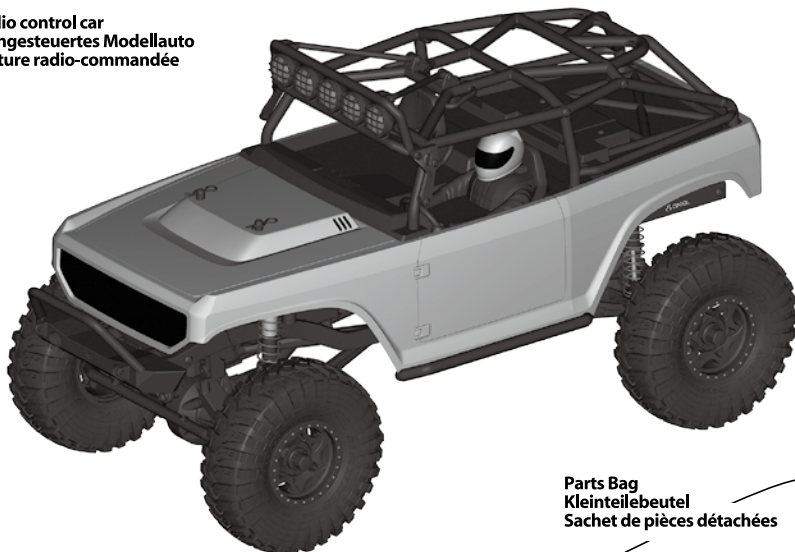


Parts Bag  
Kleinteilebeutel  
Sachet de pièces détachées

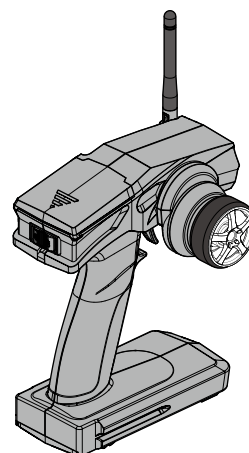


2.4GHz  
Transmitter  
Sender  
Emetteur

Cross wrench  
Steckschlüssel  
Clé à tube




Equipment needed / Benötigtes Zubehör / Equipement nécessaire




**x4**

4 AA Alkaline Dry Batteries.  
4 St. AA Trockenbatterien.  
4 piles type R6 pour votre  
radio commande.


Battery  
Akku-Pack  
Pack de batterie

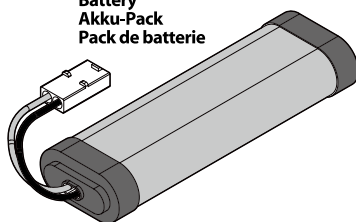




Charger  
Ladegerät  
Chargeur

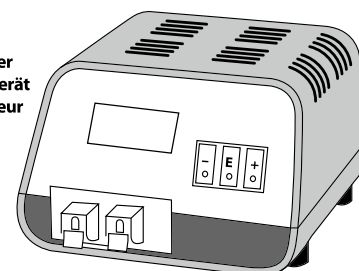


Tools Recommended / Benötigte Werkzeuge / Outillage




Hex wrench  
Inbusschlüssel  
Clé Allen

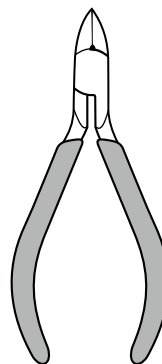

Side cutter  
Seitenschneider  
Pinces coupantes

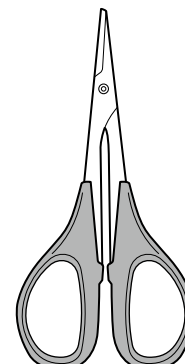


Curved scissors  
Schere  
Ciseaux

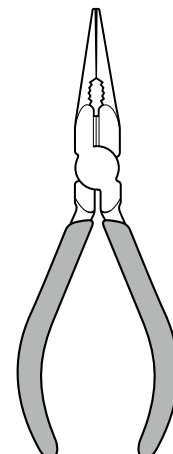


Long nose pliers  
Flachzange  
Pinces à becs longs

Modeling knife  
Modelliermesser  
Couteau de modéliste



Charge your battery / Laden des Fahrakkus / Chargement de la batterie

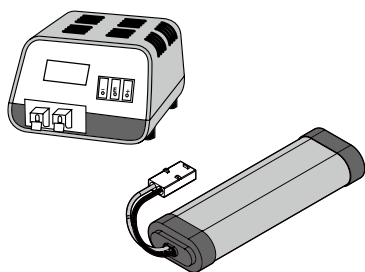

Follow the manufacturer's directions for the charger you purchased to properly charge your batteries.

Folgen Sie den Herstelleranweisungen für den Auflader Ihres gekauften ordentlich, Ihre Batterien zu laden.


Suivre les directions de fabricant pour le chargeur votre a acheté convenablement pour charger vos piles.

**Do not use Nickel Cadmium battery charger for Nickel Metal Hydride batteries. If you do not use the special charger for Nickel Metal Hydride batteries, the batteries will be damaged.**


Verwenden Sie kein Ladegerät, dass für Nickel Cadmium Akkus gedacht ist, um Nickel Metal Hydrid Akkus zu laden. Wenn Sie kein spezielles Ladegerät für Nickel Metal Hydrid Akkus verwenden, können diese beschädigt werden.

N'utilisez pas de chargeur pour batteries Cadmium-Nickel pour charger des batteries Nickel-Métal Hydride. Si vous n'utilisez pas un chargeur spécial pour des batteries Nickel-Métal Hydride, celles-ci seront endommagées.


- ① Removing the Body  
Put the battery in the car.

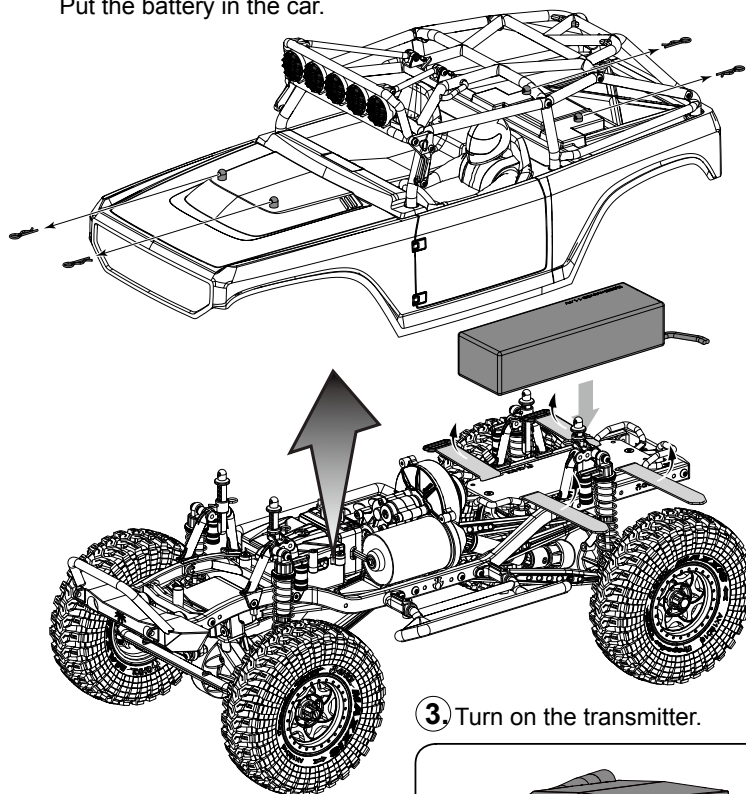



- ② Install the battery  
Put back the Body.

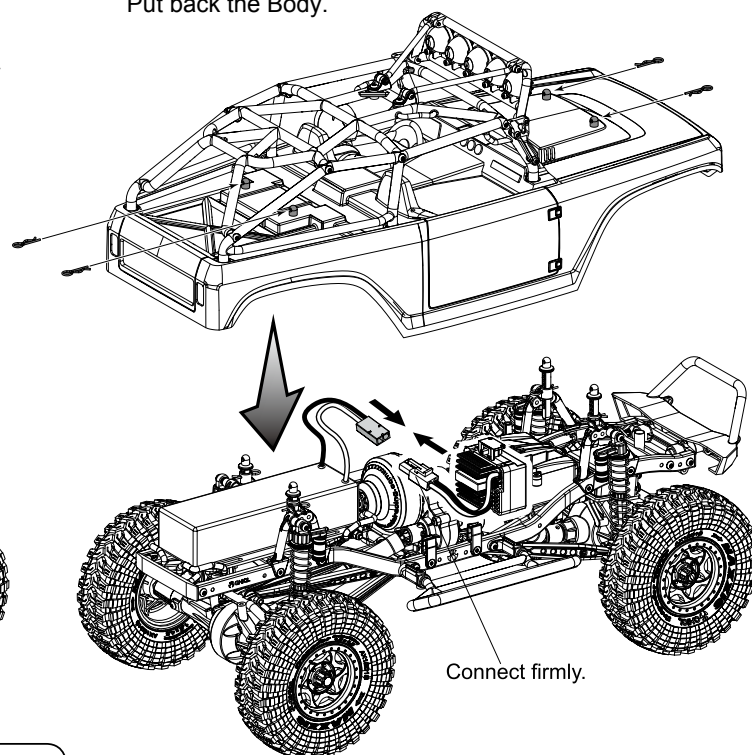

- ③ Turn on the transmitter.

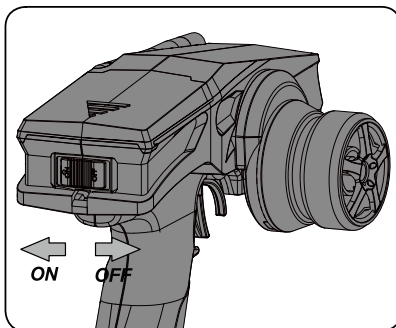


- ④ Turn on the electronic speed controller.

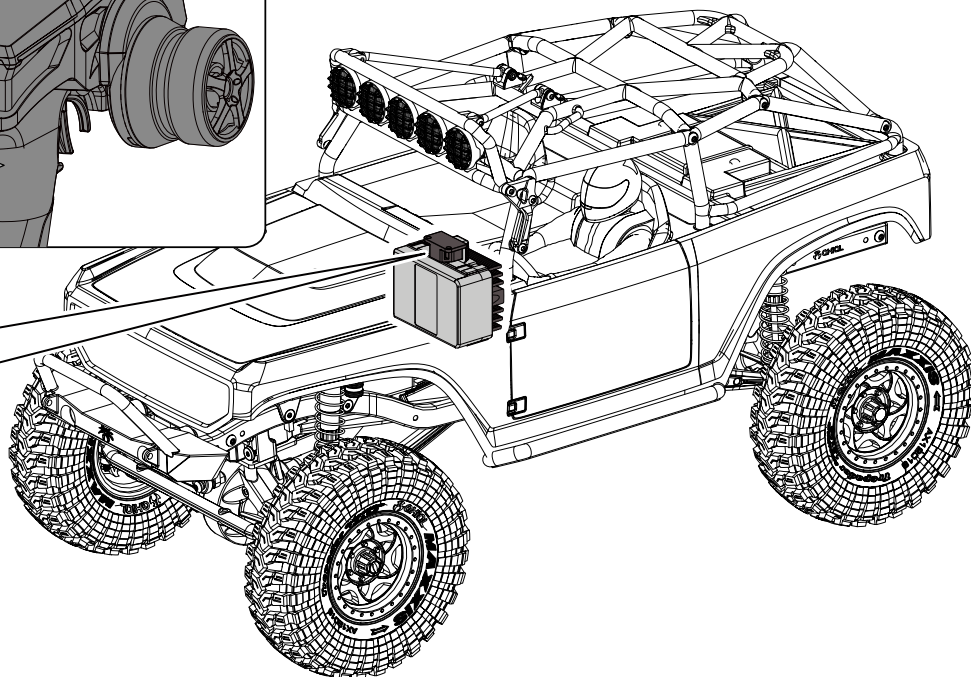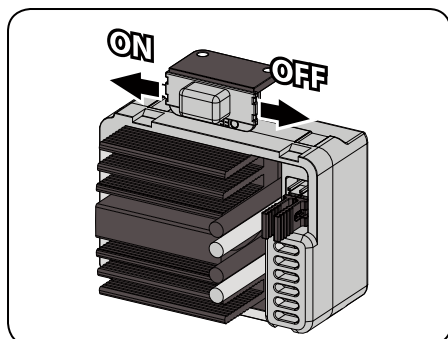




## Top View Parts

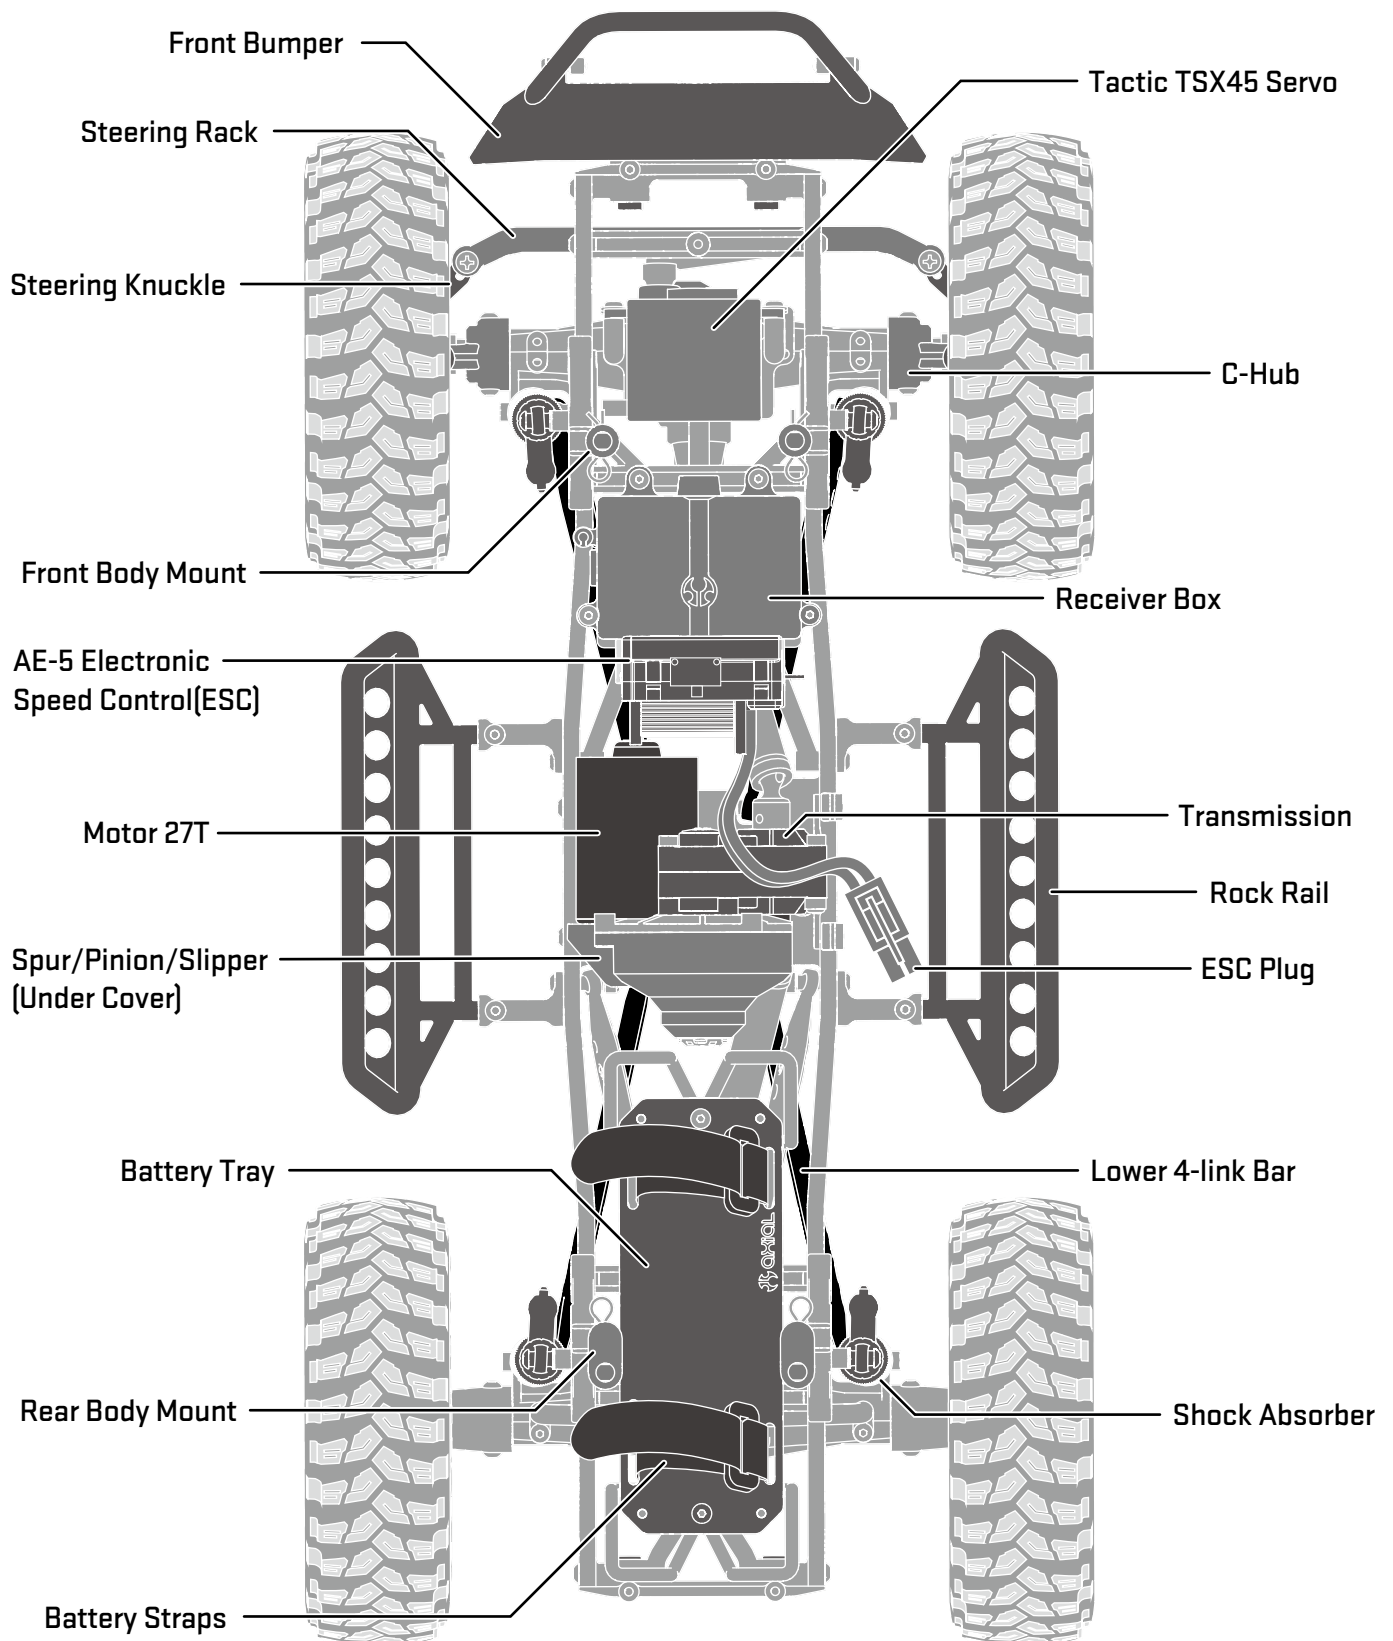


# Getting-Started Checklist


The following checklist is a guide for getting you vehicle running for the first time.

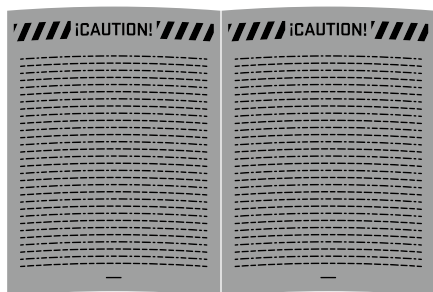


- ☐ Read 'Cautions' in Manual. (Page 2)

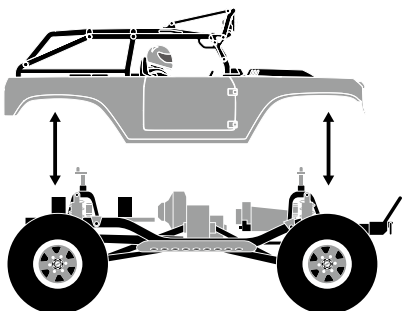


- ☐ Familiarize yourself with vehicle and its components.

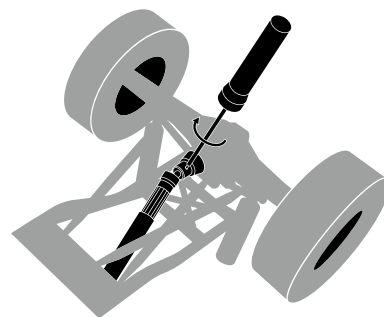


- ☐ Even though the vehicle is new check driveshaft setscrews and other screws to make sure they are tight from the factory.

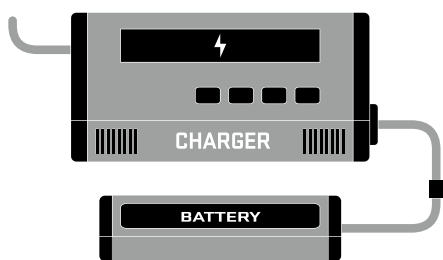


- ☐ Charge battery pack. (Page 4)




- ☐ Install 4X AA batteries into Transmitter. (Page 7)

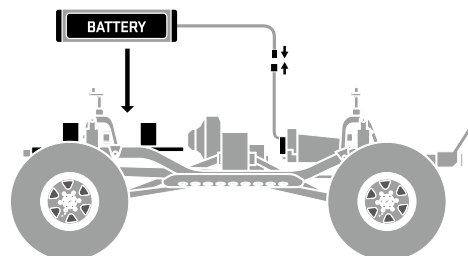

- ☐ Install battery pack in vehicle. (Page 4)

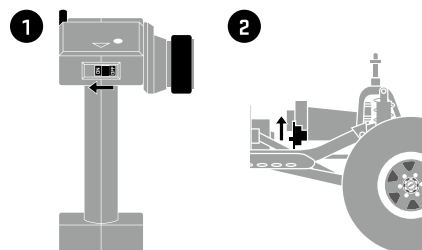


- ☐ Turn on transmitter FIRST then ESC. (Page 4)

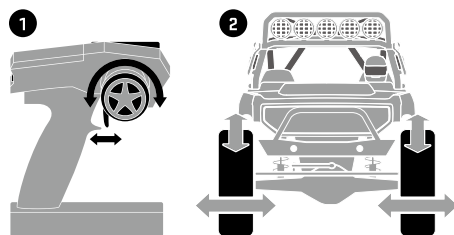


- ☐ Check to make sure steering and throttle operation work correctly. (Page 7)



- ☐ Range check radio system. (Next Page)

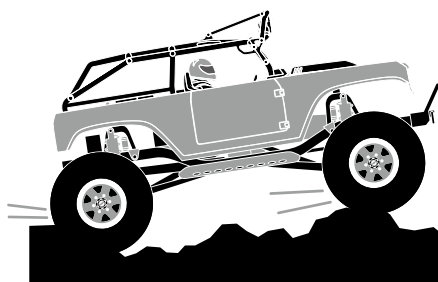

- ☐ Drive vehicle, challenge yourself and have fun!

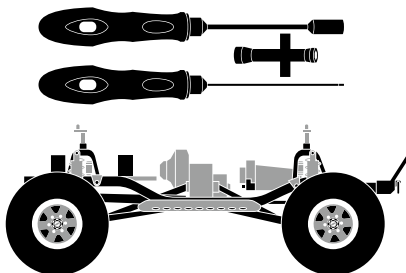

- ☐ Maintain vehicle. (Next Page)



## Range-Checking Your Radio System

The radio system should be checked before operating the vehicle to ensure it's operating properly and has adequate range.














1. Turn on the transmitter first and then the vehicle.
2. Have a friend hold the vehicle while keeping hands and loose clothing away from moving parts.
3. Walk away until you are at the farthest distance you plan to operate the vehicle.
4. Steer the vehicle back and forth and throttle both forward and reverse making sure there is no erratic behavior.
5. If any erratic behavior is exhibited do not operate the vehicle, call customer service for further assistance.




RANGE-CHECKING FOR DISTANCE

## Maintaining Your Vehicle

Just like a full size car or truck your RC vehicle must undergo periodic maintenance in order to ensure peak running performance. Preventative maintenance will also help avoid needless breakages which could result in costly repairs. Below are some suggestions to properly maintain your vehicle.

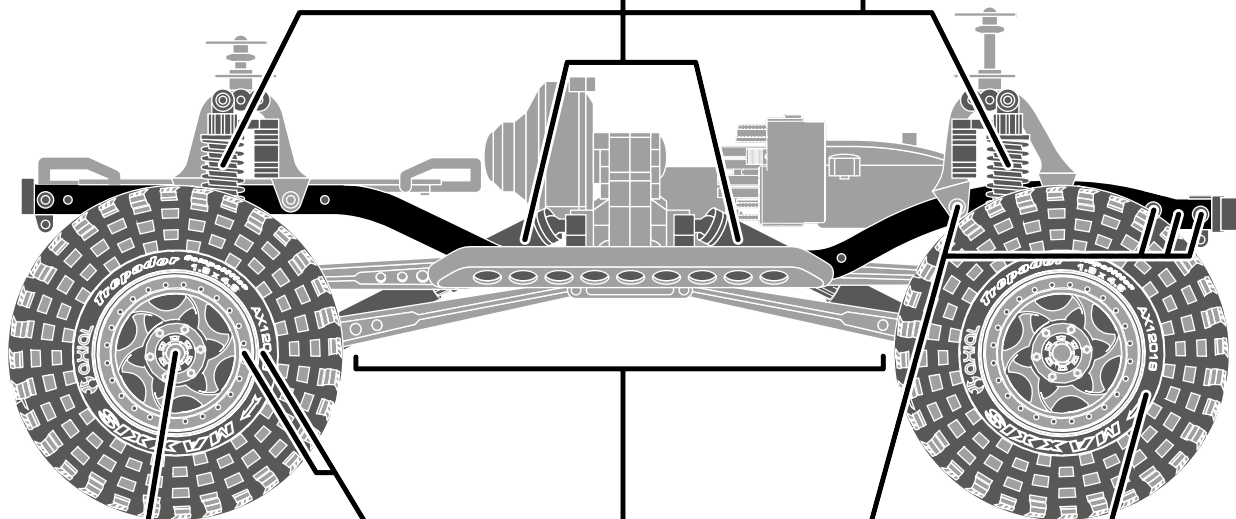

## AE-5 Forward/Reverse ESC w/ Drag Brake

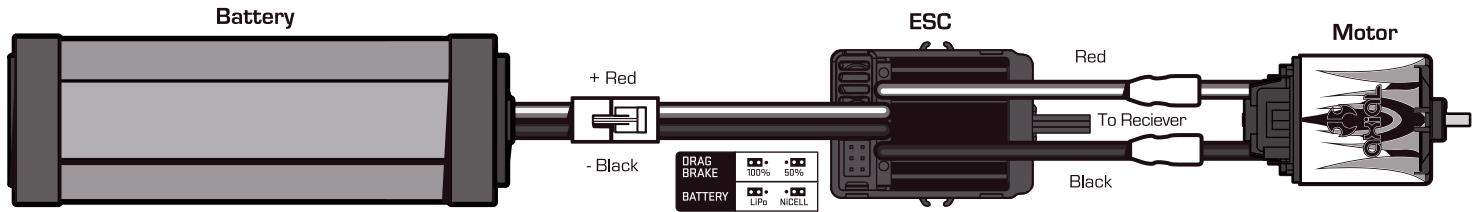

### Setup:

Throttle calibration should not be needed out-of-the-box. However in order to make the ESC match the throttle range of different transmitters, the calibration of the ESC is necessary:

- Mount the ESC in an area that is well ventilated and isolated from vibration and shock.
- Connect the ESC wires to the motor red-red & black-black.
- Plug the receiver wire into the throttle channel on the receiver. The black negative wire should be towards the outside of the receiver.
- Before plugging the battery into the ESC, make sure your transmitter is on and the throttle trim is set at zero.
- Plug in the battery to the ESC with the ESC switch in the OFF position.
- To calibrate the ESC, turn on the transmitter keeping throttle stick at its neutral position.
- Wait for 3 seconds to let the ESC execute self-test and automatic throttle calibration.
- When the ESC is ready to run, a long beep sound is emitted from the motor.

**Do not reverse the battery wire connections! Reversing the battery polarity will permanently damage the esc.**

### Notes:

- Drag Brake set to 100% from the factory.
- LiPo Cut-Off is set to "ON" from the factory.

### Specifications:

|                     |                                |
|---------------------|--------------------------------|
| Input Voltage:      | 2-3S LiPo, 5-9 Cells NiMH/NiCd |
| Size:               | 46,5mm x 34mm x 28,5mm         |
| Weight:             | 70g                            |
| Motor Limit:        | 12T 2S / 18T 3S                |
| On-Resistance FET:  | .002                           |
| Rated/Peak Current: | 180A                           |
| Braking Current:    | 90A                            |
| BEC Voltage/A:      | 5.0V 2/0A Peak                 |
| PWM Frequency:      | 1KHz                           |

### Beep Sound and LED Status:

|                |                                                                  |
|----------------|------------------------------------------------------------------|
| 1 Short Beep:  | Battery is NiMH/NiCd                                             |
| 2 Short Beeps: | Battery is 2S Lipo                                               |
| 3 Short Beeps: | Battery is 3S Lipo                                               |
| 1 Long Beep:   | Self-test and throttle calibration is OK and ESC is ready to run |



CONNECT THE BATTERY PACK JUST BEFORE DRIVING AND DISCONNECT IT IMMEDIATELY AFTER.  
ALWAYS MAKE SURE YOU ARE CONNECTING THE ESC TO A PROPER POWER SOURCE THAT HAS THE CORRECT VOLTAGE & POLARITY. INCORRECT VOLTAGES OR REVERSED POLARITY WILL DAMAGE THE ESC.  
ONCE THE BATTERY PACK IS CONNECTED, HANDLE THE MODEL WITH EXTREME CARE, MAKE SURE YOU ARE CLEAR OF ALL ROTATING PARTS.

## NOTES






## Gear Ratio / Getriebeübersetzung

Use this equation to calculate the final drive ratio.  
**Final Drive Gear Ratio = 1 / ((pinion/Spur) X .13)**

Mit dieser Gleichung können Sie die Gesamtübersetzung berechnen.

**Gesamtübersetzung = 1 / ((pinion/Spur) X .13)**

**Slower - More Torque**  
**Langsamer - Mehr Kraft**



**Faster - Less Torque**  
**Schneller - Weniger Kraft**

|        |    | 48 Pitch |       |       |       |       |       |       |       |       |       |
|--------|----|----------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
|        |    | Spur     |       |       |       |       |       |       |       |       |       |
|        |    | 70       | 72    | 75    | 78    | 81    | 85    | 87    | 90    | 93    | 96    |
| Pinion | 10 |          |       |       |       |       |       |       | 69.23 | 71.54 | 73.85 |
|        | 11 |          |       |       |       |       |       |       | 62.94 | 65.03 | 67.13 |
|        | 12 |          |       |       |       |       |       | 55.77 | 57.69 | 59.62 | 61.54 |
|        | 13 |          |       |       |       |       |       | 51.48 | 53.25 | 55.03 | 56.80 |
|        | 14 |          |       |       |       |       | 46.70 | 47.80 | 49.45 | 51.10 | 52.75 |
|        | 15 |          |       |       |       |       | 43.59 | 44.62 | 46.15 | 47.69 | 49.23 |
|        | 16 |          |       |       |       |       | 40.87 | 44.62 | 43.27 | 44.71 | 46.15 |
|        | 17 |          |       |       |       |       | 36.32 | 39.37 | 40.72 | 42.08 | 43.44 |
|        | 18 |          |       |       |       | 34.62 | 34.41 | 37.18 | 38.46 | 39.74 | 41.03 |
|        | 19 |          |       |       |       | 32.79 | 34.41 | 35.22 | 36.44 | 37.65 | 38.87 |
|        | 20 |          |       |       |       | 31.15 | 32.69 | 33.46 | 34.62 | 35.77 | 36.92 |
|        | 21 |          |       |       | 28.57 | 29.67 | 31.14 | 31.87 | 32.97 | 34.07 | 35.16 |
|        | 22 |          |       |       | 27.27 | 28.32 | 29.72 | 30.42 | 31.47 | 32.52 | 33.57 |
|        | 23 |          |       |       | 26.09 | 27.09 | 28.43 | 29.10 | 30.10 | 31.10 | 32.11 |
|        | 24 |          |       | 24.04 | 25.00 | 25.96 | 27.24 | 27.88 | 28.85 | 29.81 | 30.77 |
|        | 25 |          |       | 23.08 | 24.00 | 24.92 | 26.15 | 26.77 | 27.69 | 28.62 | 29.54 |
|        | 26 |          |       | 22.19 | 23.08 | 23.96 | 25.15 | 25.74 | 26.63 | 27.51 | 28.40 |
|        | 27 |          | 20.51 | 21.37 | 22.22 | 23.08 | 24.22 | 24.79 | 25.64 | 26.50 | 27.35 |
|        | 28 |          | 19.78 | 20.60 | 21.43 | 22.25 | 23.35 | 23.90 | 24.73 | 25.55 | 26.37 |
|        | 29 | 18.57    | 19.10 | 19.89 | 20.69 | 21.49 | 22.55 | 23.08 | 23.87 | 24.67 | 25.46 |
|        | 30 | 17.95    | 18.46 | 19.23 | 20.00 | 20.77 | 21.79 | 22.31 | 23.08 | 23.85 | 24.62 |
|        | 31 | 17.37    | 17.87 | 18.61 | 19.35 | 20.10 | 21.09 | 21.59 | 22.33 | 23.08 | 23.82 |
|        | 32 | 16.83    | 17.31 | 18.03 | 18.75 | 19.47 | 20.43 | 20.91 | 21.63 | 22.36 | 23.08 |
|        | 33 | 16.32    | 16.78 | 17.48 | 18.18 | 18.88 | 19.81 | 20.28 | 20.98 | 21.68 | 22.38 |
|        | 34 | 15.84    | 16.29 | 16.97 | 17.65 | 18.33 | 19.23 | 19.68 | 20.36 | 21.04 | 21.72 |
|        | 35 | 15.38    | 15.82 | 16.48 | 17.14 | 17.80 | 18.68 | 19.12 | 19.78 | 20.44 | 21.10 |

## Warranty Info

### AXIAL LIMITED WARRANTY

Your Axial product is warranted to be free of defects in materials and workmanship when new in the factory sealed box. This warranty does not cover damages due to normal wear and tear, users' failure to perform routine maintenance, error of assembly or installation, modifications or addition of aftermarket parts or option parts. This warranty lasts as long as the original purchaser owns the product and is not transferable (verified by dated itemized sales receipt accompanied with product). In the event of a defect under this warranty, Axial will, at our discretion, repair or replace the product, provided our inspection indicates that an original defect exists. Axial provides a 10-day warranty from the date of purchase on electronics (i.e. servo, esc, radio). Axial reserves the right to replace any product which is no longer available with a product of comparable value and function. If Axial determines the repair is not covered under warranty guidelines, there could be a charge applied for the repair and return shipping charges. Note: Purchasing products from unauthorized distributors may void warranty and prevent support and service.

### INTERNATIONAL CUSTOMER WARRANTY

Please return product to the dealer where the purchase was made. If your Axial product purchase was made through an on-line retailer, any warranty issues must be taken care of by that retailer. Axial assumes no responsibility for Axial products sold internationally by on-line retailers.

### REPAIR

For warranty repair, please contact Axial Customer Service at (877) 64-AXIAL (877-642-9425).

### HOURS AVAILABLE:

8:00 am - 5:00 pm Monday through Friday, Central Time.



## Problem Problem Problème

## Cause Grund Cause

## Remedy Lösung Remède

**Does not move**  
**Das Auto fährt nicht**  
**Le véhicule ne bouge pas**

**Batteries are not installed properly in the transmitter.**  
**Die Batterien sitzen nicht korrekt im Sender.**  
**Les piles ne sont pas placées correctement dans l'émetteur.**

**Weak or no battery in model.**  
**Leerer oder kein Akku im Auto.**  
**Batterie faible ou non installée**

**Damaged motor.**  
**Kaputter Motor.**  
**Moteur endommagé**

**Frayed or broken wiring.**  
**Beschädigte Verkabelung.**  
**Câble dénudé ou coupe**

**ESC is shut down by heat protection circuit.**  
**Notabschaltung des Reglers wegen Überhitzung.**  
**Le système ESC est fermé par le circuit de protection thermique.**

**Make sure batteries are properly installed.**  
**Legen Sie die Batterien korrekt ein.**  
**Positionnez correctement les piles dans l'émetteur.**

**Install charged battery.**  
**Einbauen eines geladenen Akkus.**  
**Mettez en place une batterie chargée**

**Replace with new motor.**  
**Austausch durch einen neuen Motor.**  
**Remplacez par un nouveau moteur**

**Splice and insulate wiring completely.**  
**Erneuern und isolieren Sie die kaputte Stelle.**  
**Faites une épissure et isolez complètement le câble.**

**Stop driving immediately, do not drive the car until the Speed Controller cools down.**  
**Fahren Sie nicht weiter. Warten Sie bis der Fahrten regler abgekühlt ist.**  
**Arrêtez immédiatement de conduire, ne pilotez pas la voiture tant que le contrôleur de vitesse n'a pas refroidi.**

**No Control.**  
**Keine Kontrolle über das Auto**  
**Pas de contrôle**

**Improper antenna on transmitter or model.**  
**Zu kurze Antenne am Sender oder Auto.**  
**Antenne inadéquate sur l'émetteur ou le véhicule**

**Weak or no batteries in transmitter or model.**  
**Leere oder keine Batterien im Sender oder Auto.**  
**Batterie faible ou absente dans l'émetteur ou le véhicule.**

**Neutral position or trim is incorrect.**  
**Neutralposition oder Trimmung sind verstellt.**  
**La position neutre est incorrecte ou le trim n'est pas réglé.**

**Are the receiver and battery connections properly connected?**  
**Sind der Empfänger und die Batterieverbindungen ordentlich verbunden?**  
**Son conectadas apropiadamente las conexiones del receptor y la batería?**

**Install charged or fresh batteries.**  
**Einbauen voller Batterien.**  
**Mettez des batteries rechargées ou neuves.**

**Fully extend antenna.**  
**Ziehen Sie die Antenne vollständig aus.**  
**Dépliez complètement l'antenne.**

**Adjust the steering trim.**  
**Stellen Sie die Lenkungstrimmung neu ein.**  
**Réglez le trim de direction.**

**Check receiver and battery connections.**  
**Prüfen Sie Empfänger und Batterieverbindungen.**  
**Compruebe conexiones de batería y receptor.**


**Steering and Throttle Function Reversed.**  
**Lenkung und Gas funktionieren genau verkehrt herum.**  
**Direction et accélération inverses.**

**Servo reverse switch is in wrong position.**  
**Servorichtungs-Schalter ist in der falschen Position.**  
**L'interrupteur de marche arrière du servo est dans la mauvaise position**


**Please check that the wires from ESC to motor are connected properly.**  
**Bitte überprüfen Sie, ob die Kabel vom Regler zum Motor richtig sitzen.**  
**Veuillez vérifier que les fils allant de l'ESC au moteur sont correctement raccordés.**

**Set to correct position.**  
**Satz, Position zu korrigieren**  
**Vérifiez la position correcte**


**Check to make sure motor and ESC are properly connected.**  
**Kontrolle sich zu vergewissern, dass Motor und ESC ordentlich verbunden sind.**  
**Le contrôle pour assurer que le moteur et ESC est convenablement connecté.**

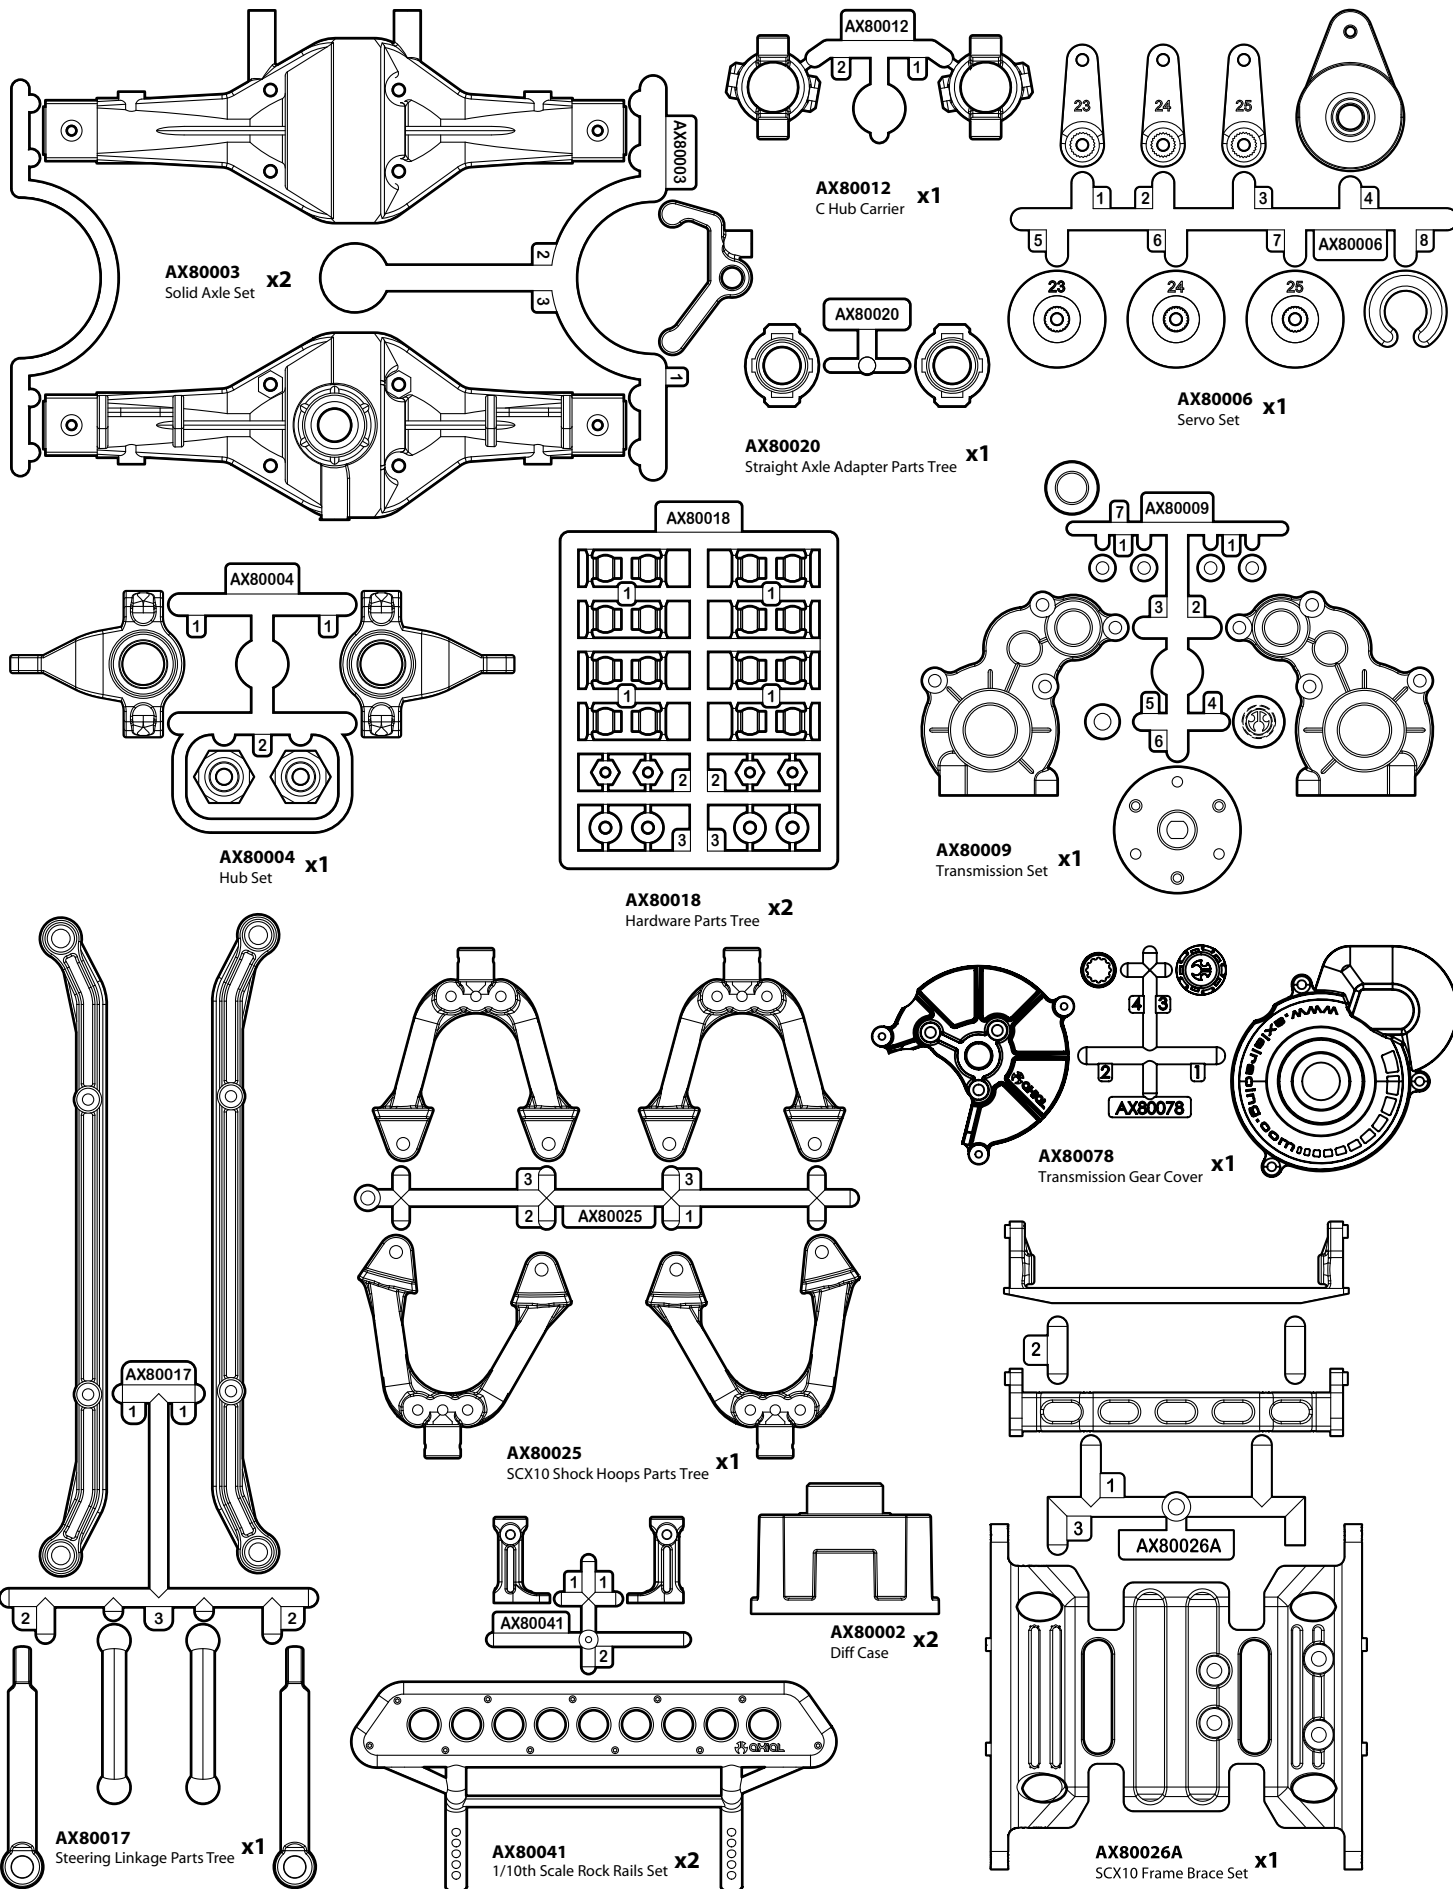




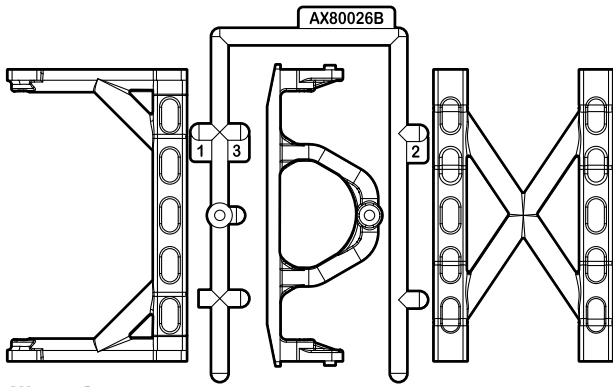


**AX80026B**  
SCX10 Frame Brace Set **x1**

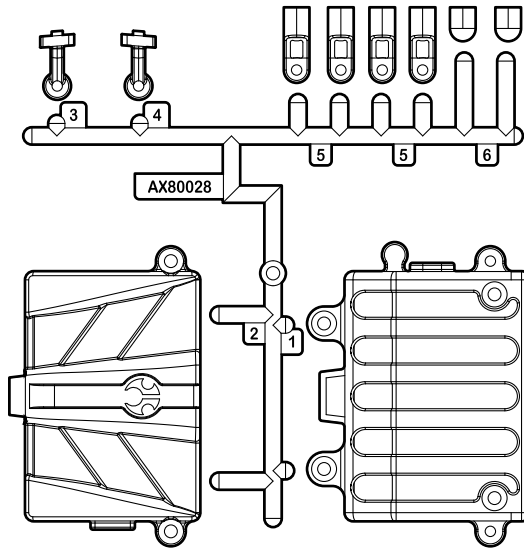


**AX80028**  
SCX10 Radio Box Parts Tree **x1**




**AX80030**  
61-90 Shock Body Set **x2**

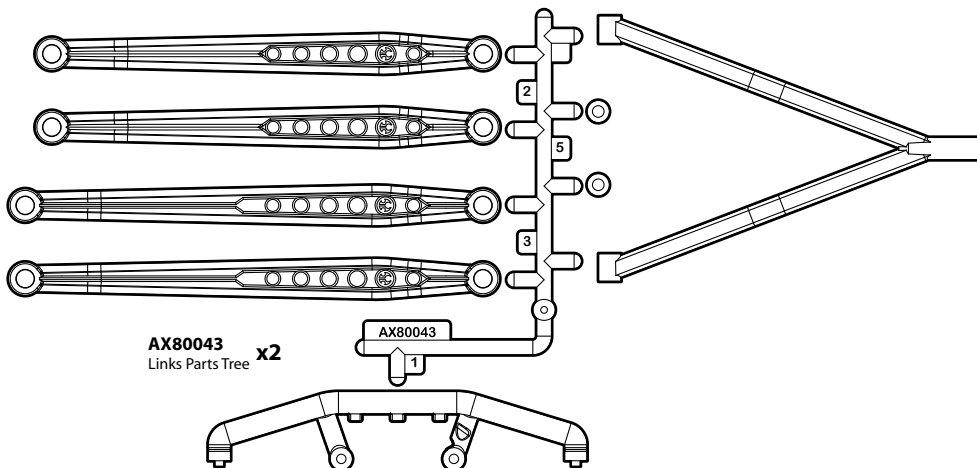


**AX80043**  
Links Parts Tree **x2**

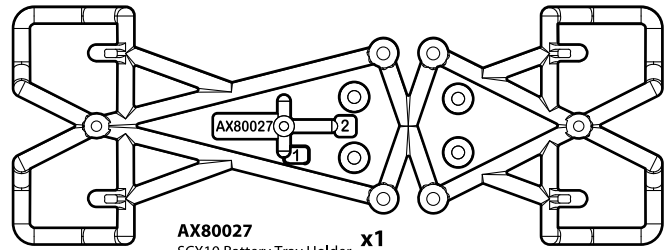


**AX80027**  
SCX10 Battery Tray Holder **x1**

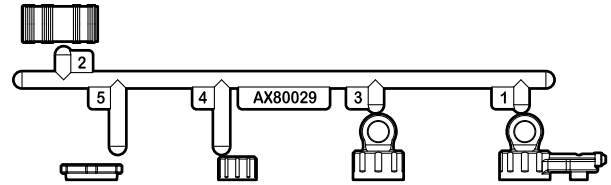



**AX80029**  
Shock Cap Parts Tree **x4**

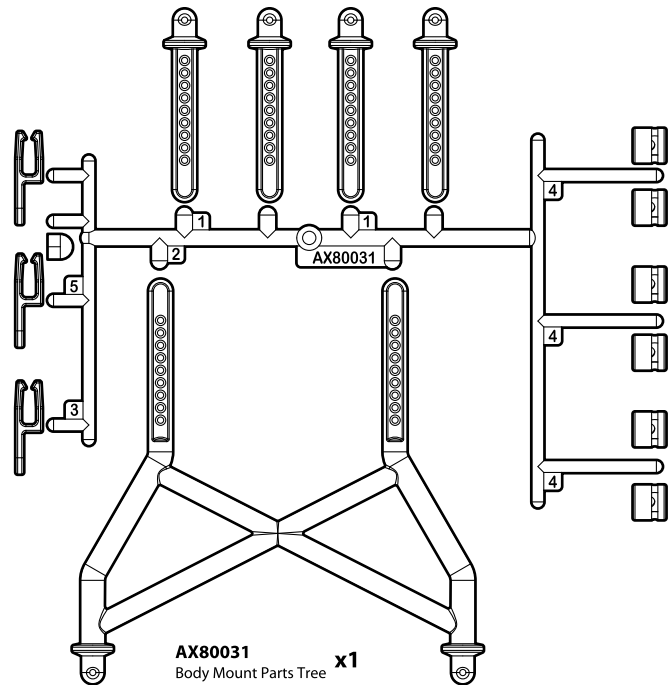



**AX80031**  
Body Mount Parts Tree **x1**

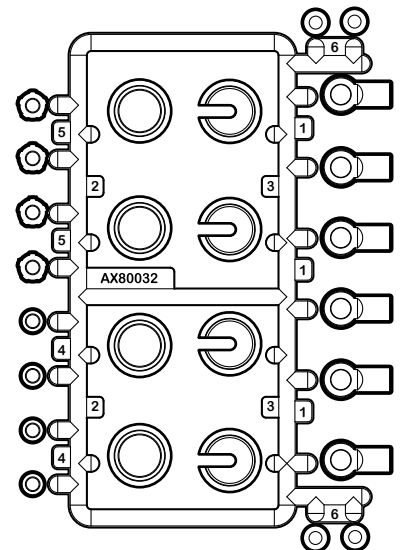


**AX80032**  
Shock Parts **x1**

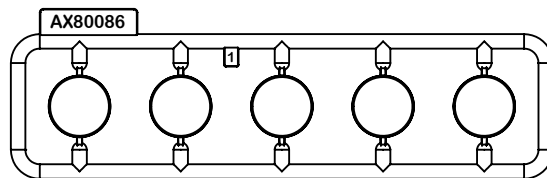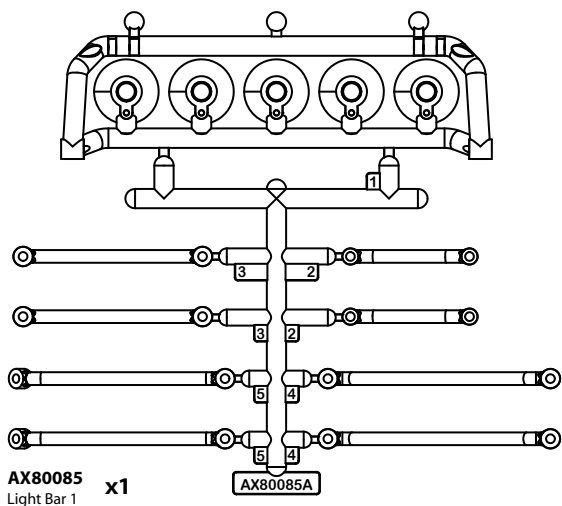


**AX80086**  
Light Bar Lenses **x1**

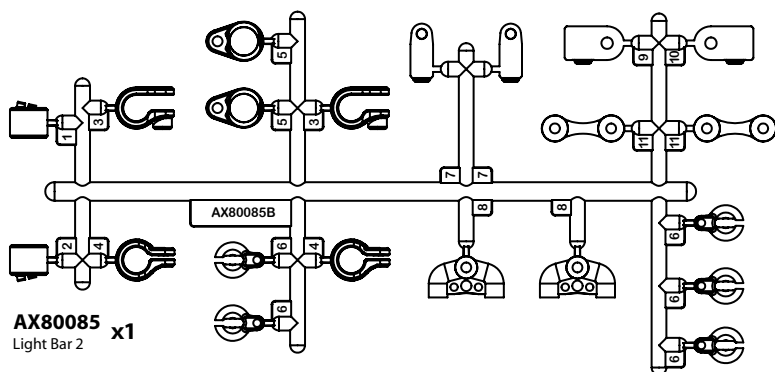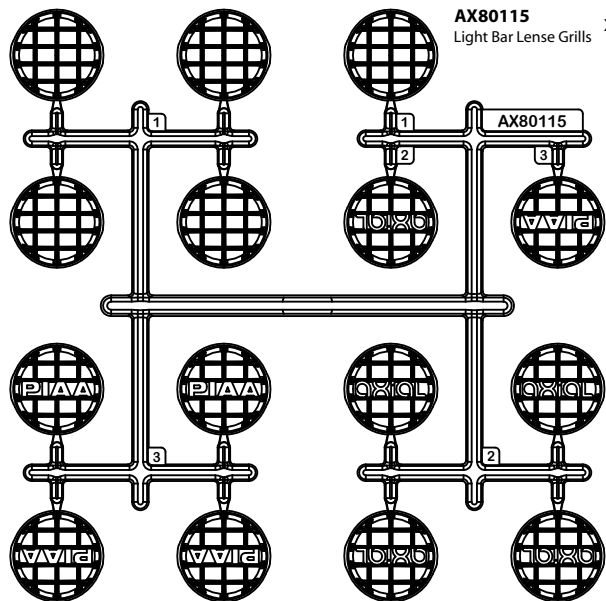


**AX80085B**  
Light Bar 2 **x1**

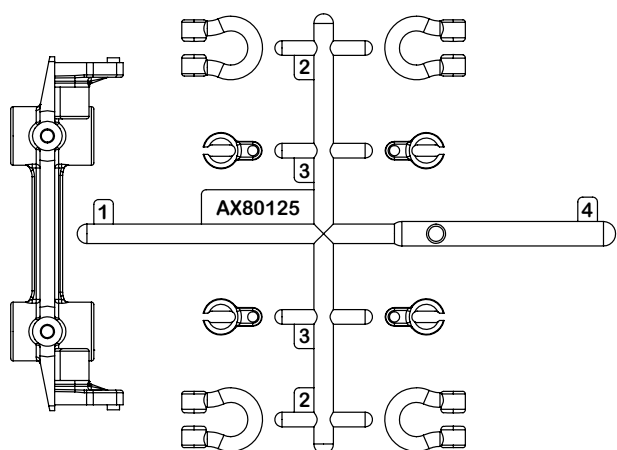


**AX80125**  
Poison Spyder Front Bumper **x1**

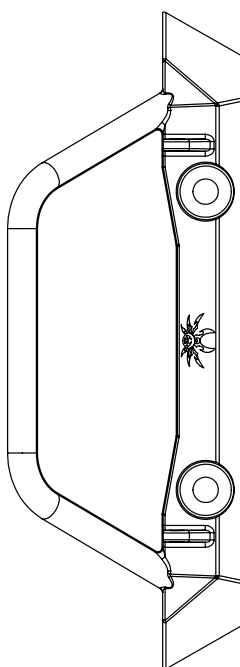


**AX31114**  
WB8-HD Driveshaft **x1**

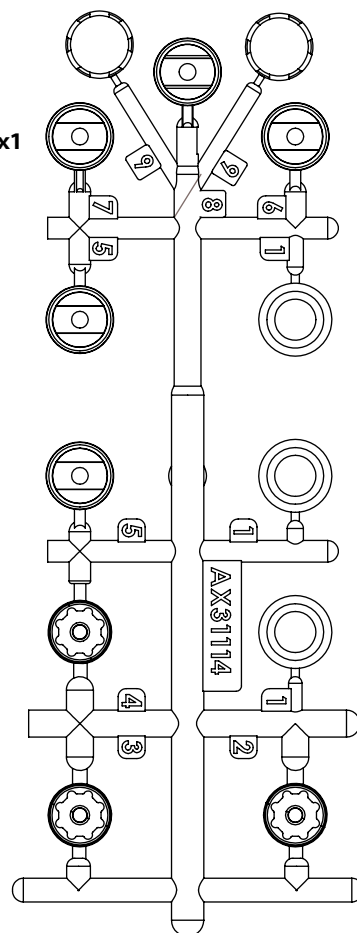


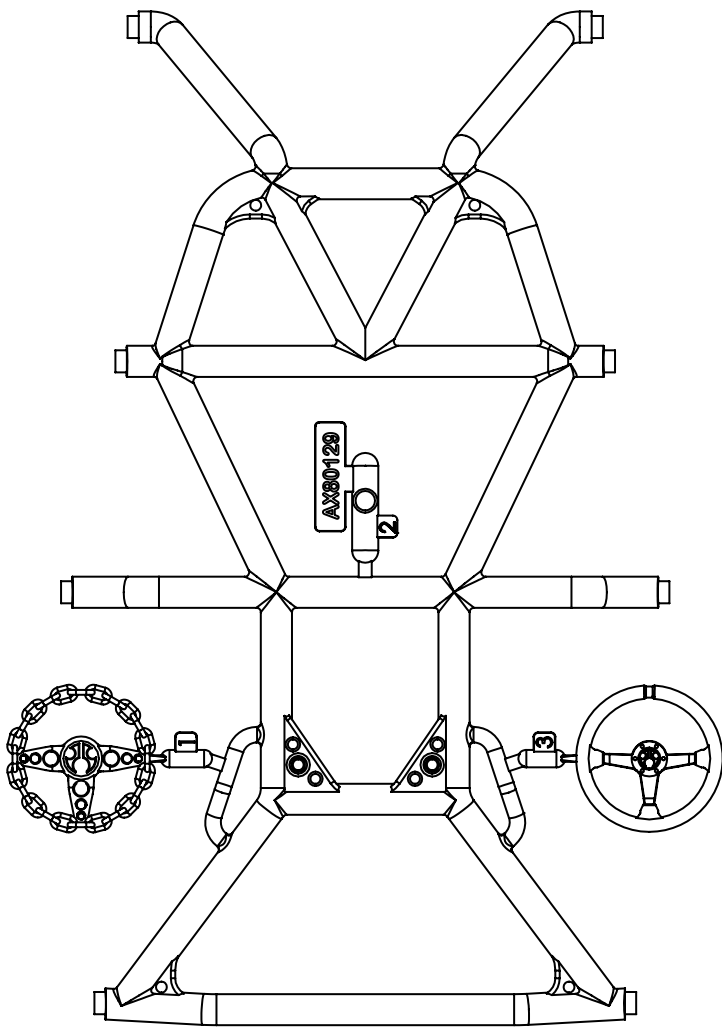


**AX80129**  
Roll Cage Top **x1**




**AX8087**  
Wheel Cap **x1**

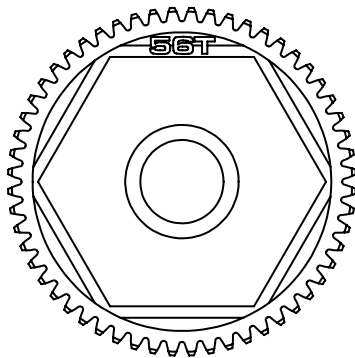


**AX31027**  
56T 32P Spur gear **x1**




**AX08138**  
1.9 Walker Evans Wheels - Black **x4**




**AX31027**  
4x11mm bushing **x1**




**AX80010**  
Gear Set **x1**

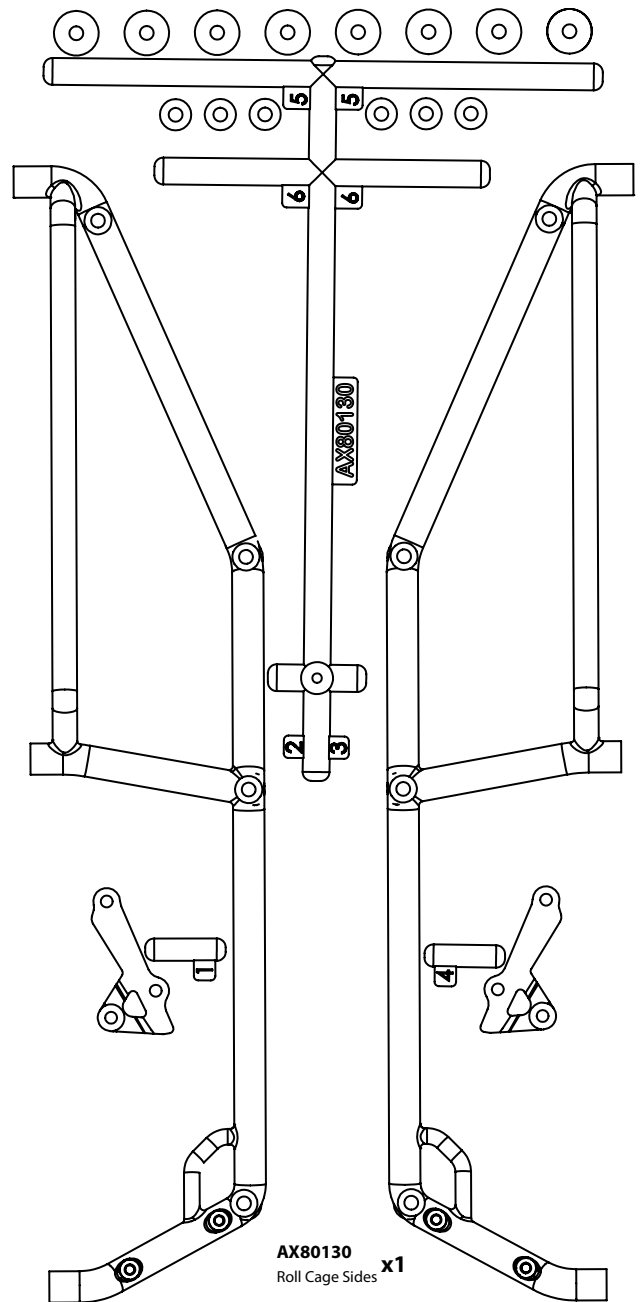

**AX80130**  
Roll Cage Sides **x1**

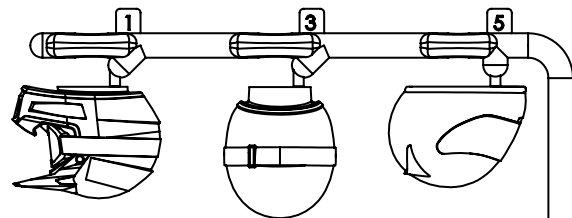

**AX80131**  
Helmets **x1**

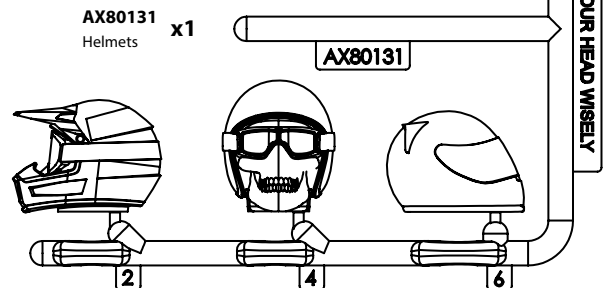

**AX30146** x4  
Shock Shaft 3x50mm

**AX30162** x1  
Pin 1.5x8mm

**AX30163** x6  
Pin 2x10mm

**AX31028** x4  
Pin 2x11mm

**AX30190** x1  
Shaft 5x18

**AX30435** x1  
Outdrive Shaft

**AX30435** x1  
Outdrive Shaft

**AX30408** x2  
Input Shaft 5x29mm

**AX31148** x4  
Universal joint Axle Pin holder

**AX30485** x1  
AX10 Scorpion Servo Plate

**AX30366** x2  
Axle 5x35mm

**AX31148** x4  
Joint 10X15MM

**AX31148** x4  
Joint Male Universal

**AX31149** x1  
Drive gear Shaft 5x54.5mm

**AX31145** x4  
Spring 12.5x60mm X.X lbs/in

**AX30483** x1  
AX10 Scorpion Battery Tray

**AX31026** x2  
Slipper Plate

**AX30413** x1  
Spring 8.5x12

**AX30427** x4  
12mm Aluminum Hub

**AX30420** x2  
Solid Axle Dogbone 6x74mm

**AX30421** x2  
Solid Axle Dogbone 6x104.5mm

**AX31068** x2  
Slipper Pad

**AX30385** x2  
Diff Gasket 16x25x0.5mm

**AX30392** x2  
38T Bevel Gear

**AX30450** x4  
Flange Pipe 3x4.5x5.5

**AX30499** x1  
Transmission Spacer 5x6.9x4.8mm - Grey

**AX30491** x1  
AX10 Scorpion Motor Plate

**AX30393** x2  
13T Bevel Gear

**AX30394** x1  
20T Drive Gear

**AX30500** x2  
Heavy Duty Locker

**AX30724** x1  
Pinion Gear 32P 13T - Steel

**AX30502** x2  
SCX10 Chassis Rail

 **AXA013**  
M2x6mm **x12**

 **AXA015**  
M2x10mm **x8**

 **AXA083**  
M3x6mm **x2**

 **AXA086**  
M3x12mm **x4**

 **AXA087**  
M3x16mm **x8**

 **AXA088**  
M3x20mm **x1**

 **AXA089**  
M3x25mm **x7**

 **AXA1045**  
M4 Nylon Lock Nut **x5**

 **AXA1053**  
M3 Nylon Locking Hex Nut **x15**

 **AXA1059**  
6mm Body Clip **x8**

 **AXA1070**  
Washer 3x6x0.5mm **x3**


 **AXA1179**  
O-Ring 2.5x1.5mm **x8**

 **AXA1163**  
O-Ring 7x1mm **x4**


 **AXA1218**  
Bearing 5x10x4mm **x4**

 **AXA1221**  
Bearing 5x11x4mm **x10**

 **AXA1225**  
Bearing 8x16x5mm **x2**

 **AXA1230**  
Bearing 10x15x4mm **x6**

 **AXA0109**  
M3x10mm **x4**

 **AX31073**  
M3x4x15mm Step Screw **x2**

 **AXA1358**  
Shock Damper 3x7x8 **x4**

 **AXA1417**  
Shock Damper 5x6 **x1**

 **AXA1392**  
E2 e-clip **x8**

 **AXA1393**  
E2.5 e-clip **x2**

 **AXA176**  
M3x2.5x13mm Screw Shaft **x2**

 **AXA286**  
M4x12mm Screw Shaft **x4**

 **AXA180**  
M3x3mm Set Screw **x4**

 **AXA291**  
M4x4mm Set Screw **x1**

 **AXA0113**  
M3x6mm Hex Socket Button Head **x7**

 **AXA117**  
M3x15mm Hex Socket Button Head **x1**

 **AXA119**  
M3x20mm Hex Socket Button Head **x4**

 **AXA121**  
M3x30mm Hex Socket Button Head **x1**

 **AXA144**  
M3x8mm Hex Socket Flat Head **x4**

 **AXA423**  
M2.6x8mm Hex Socket Tapping Button Head **x4**

 **AXA424**  
M2.6x10mm Hex Socket Tapping Button Head **x6**

 **AXA433**  
M3x6mm Hex Socket Tapping Button Head **x8**

 **AXA434**  
M3x8mm Hex Socket Tapping Button Head **x9**

 **AXA435**  
M3x10mm Hex Socket Tapping Button Head **x4**

 **AXA436**  
M3x12mm Hex Socket Tapping Button Head **x15**

 **AXA438**  
M3x18mm Hex Socket Tapping Button Head **x4**

 **AXA440**  
M3x25mm Hex Socket Tapping Button Head **x1**

 **AXA414**  
M2.6x10mm Hex Socket Tapping Flat Head **x3**

 **AXA463**  
M3x6mm Hex Socket Tapping Flat Head **x3**


 **AXA464**  
M3x8mm Hex Socket Tapping Flat Head **x14**

 **AXA465**  
M3x10mm Hex Socket Tapping Flat Head **x4**


 **AXA466**  
M3x12mm Hex Socket Tapping Flat Head **x6**




## Body Assembly


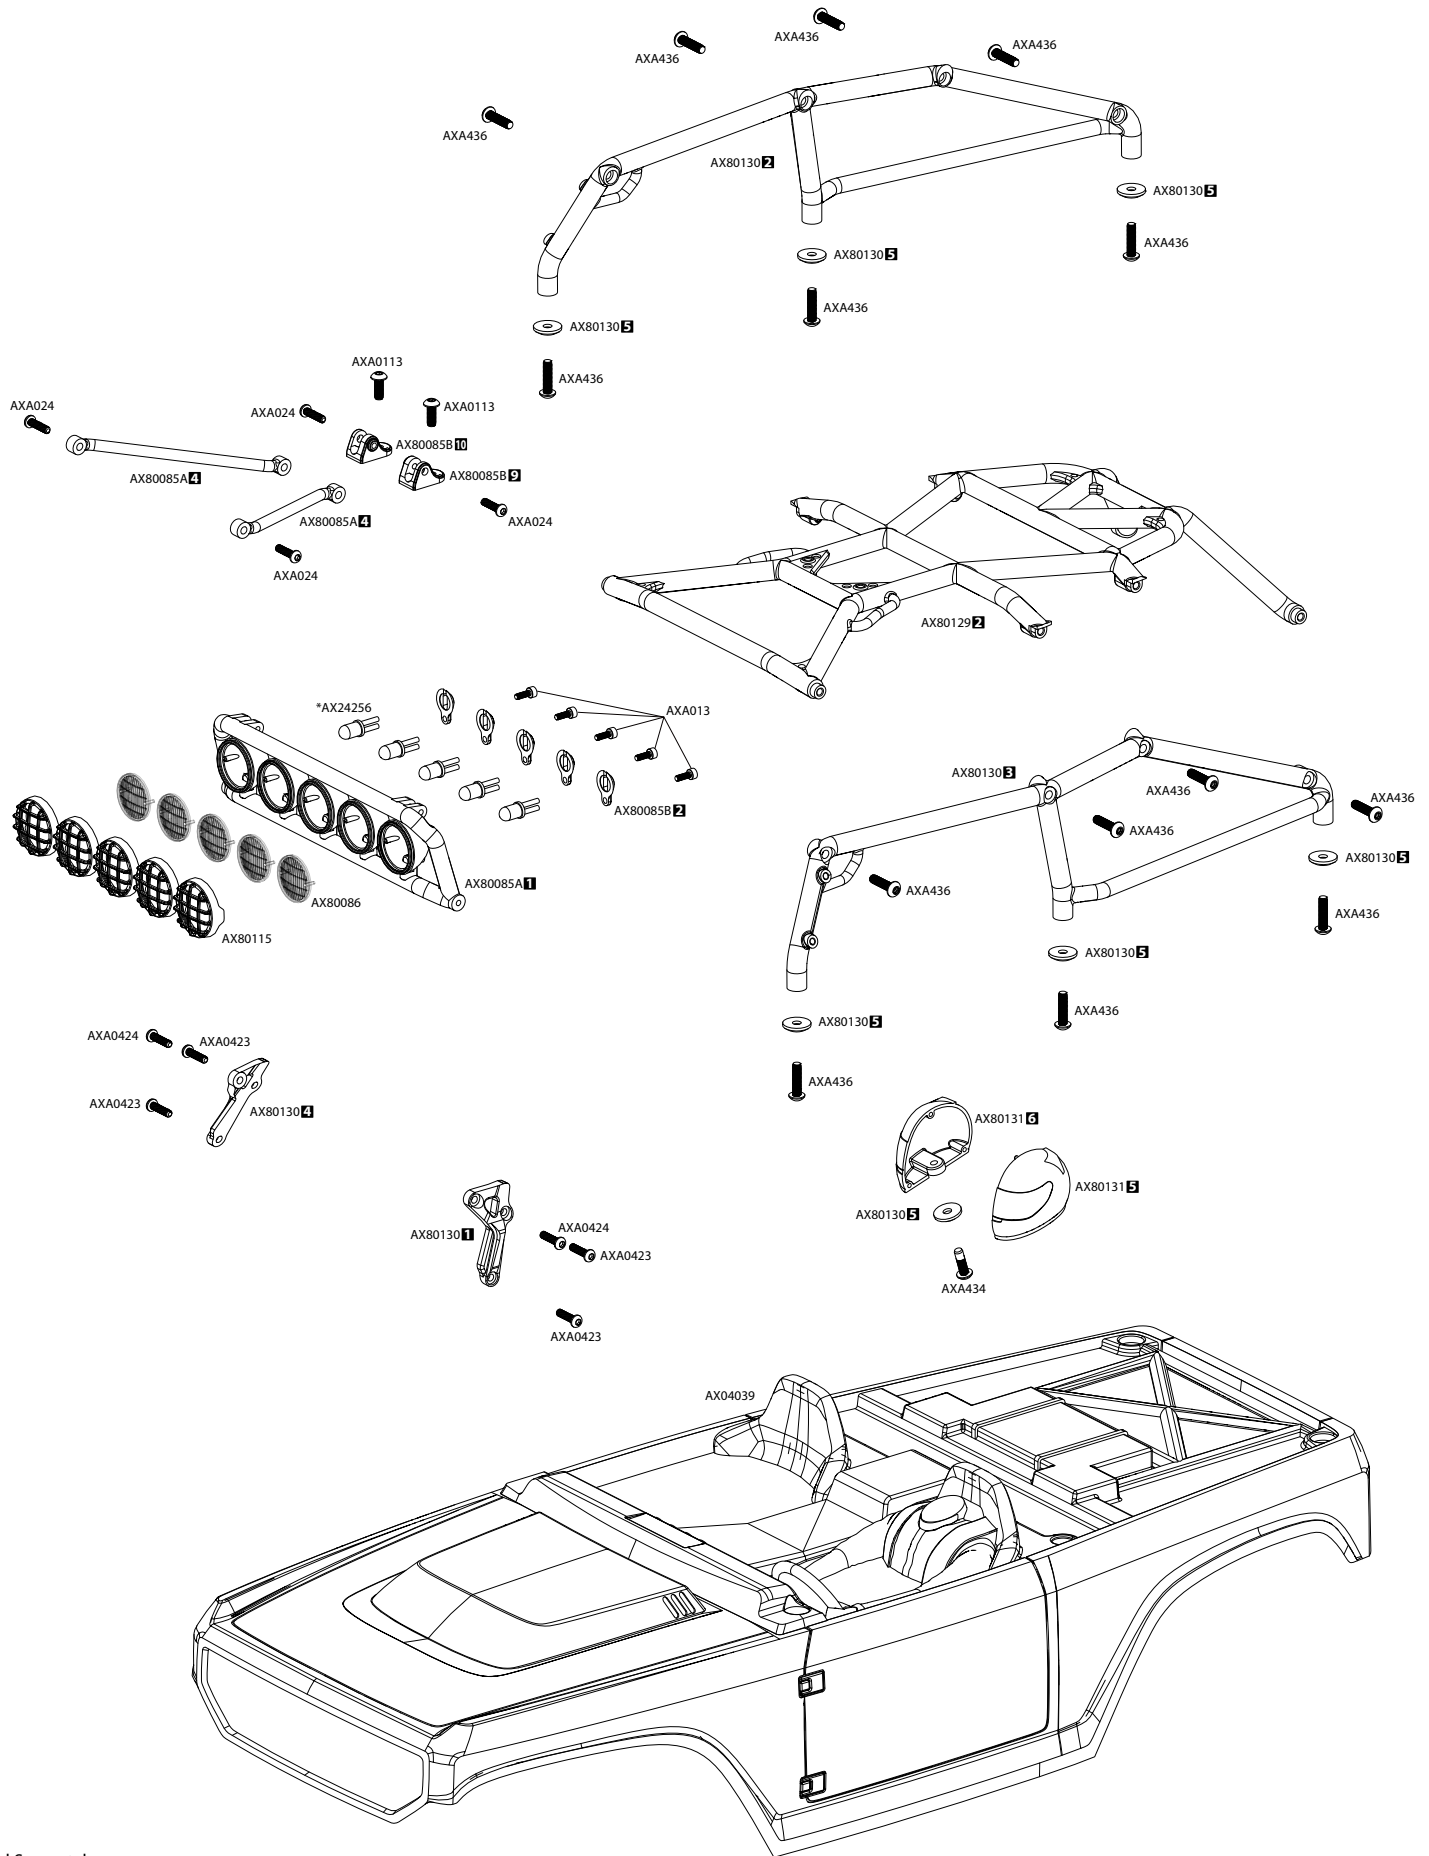


\* Sold Separately

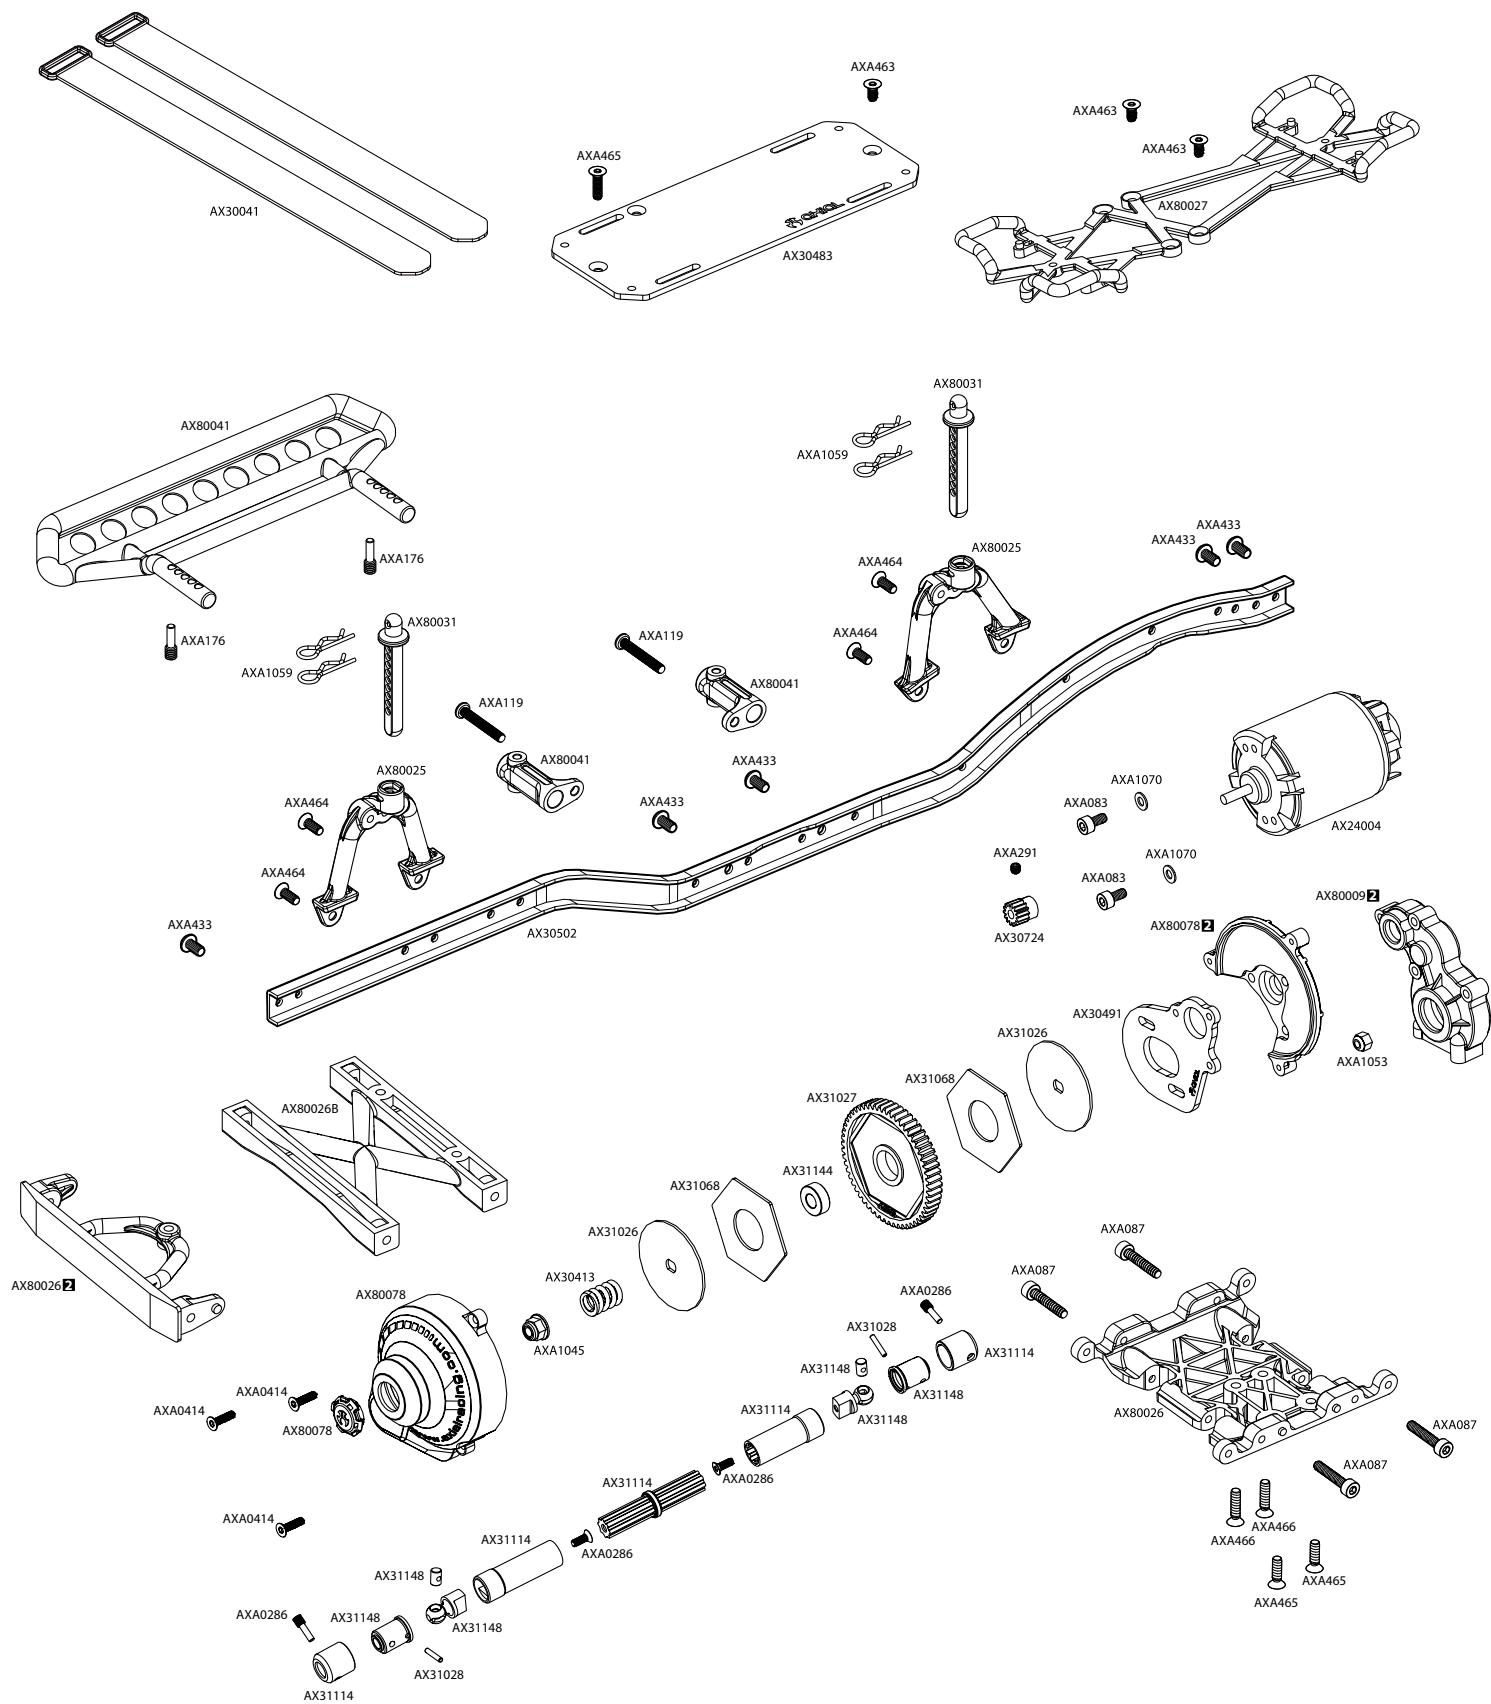



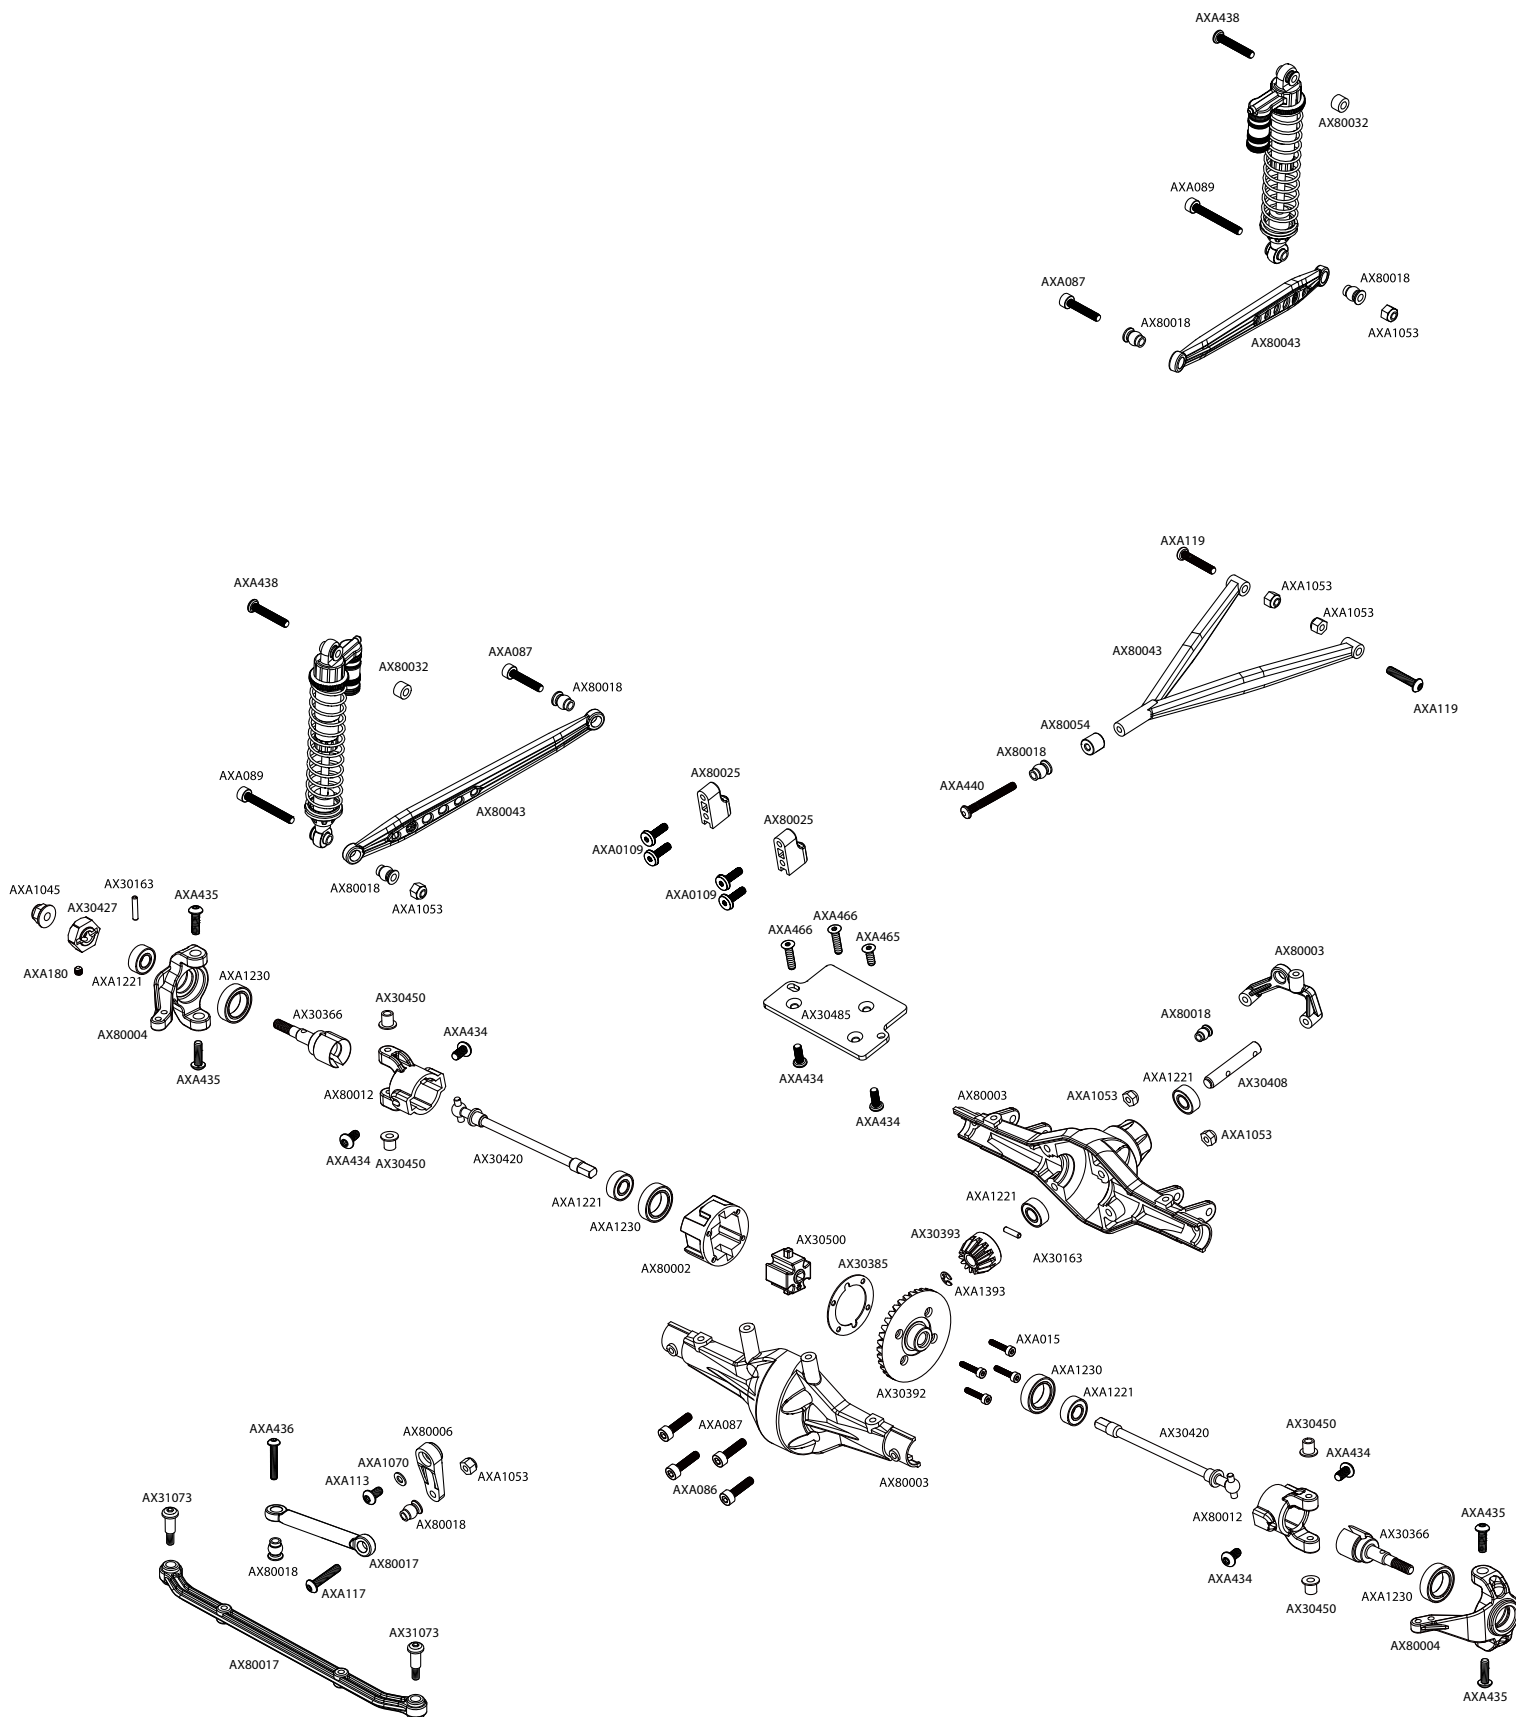

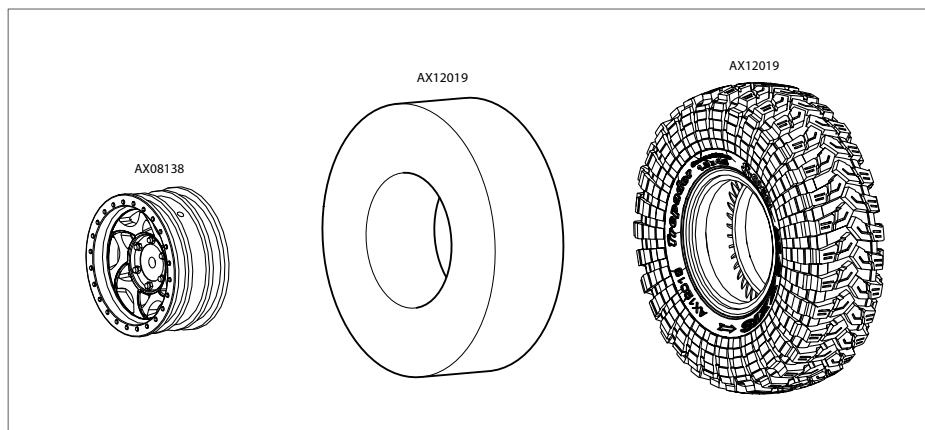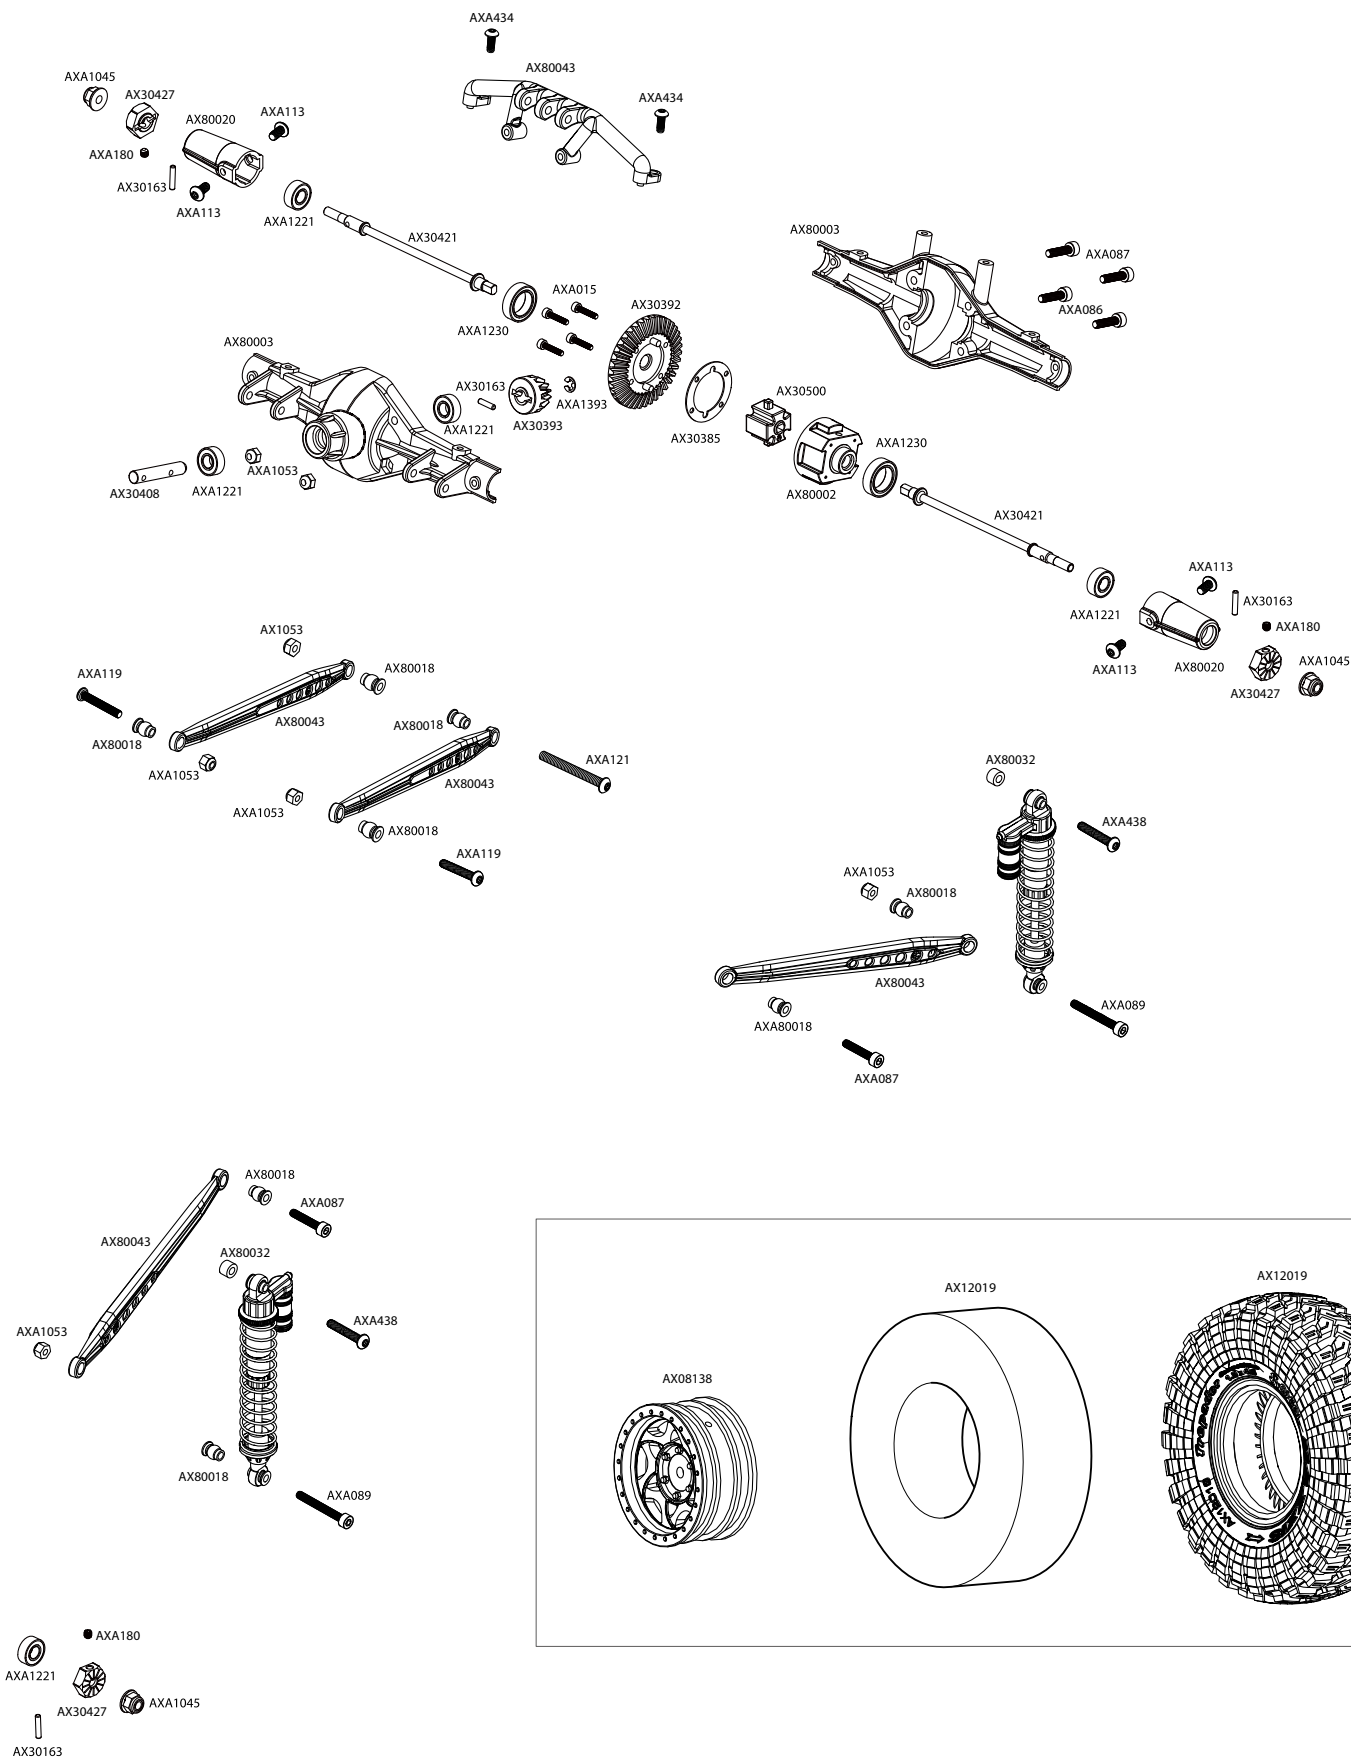



## Parts List

### Part # Description

|         |                                                                |
|---------|----------------------------------------------------------------|
| AX04039 | AX10 Deadbolt Body - .040" (Clear) - Body Only                 |
| AX08138 | 1.9 Walker Evans Street Wheel - Black (2pcs)                   |
| AX12019 | 1.9 Maxxis Trepador Tires - R35 Compound (2pcs)                |
| AX24004 | Axial 27T Electric Motor                                       |
| AX24206 | 2.4GHz Radio System (2 Channel) (AX-3, AR-3)                   |
| AX30041 | Velcro Strap 15x160mm                                          |
| AX30146 | Shock Shaft 3x50 (2pcs)                                        |
| AX30162 | Pin 1.5x8mm (6pcs.)                                            |
| AX30163 | Pin 2.0x10mm (6pcs.)                                           |
| AX30190 | Shaft 5x18 (2pcs.)                                             |
| AX30366 | Axle 5x35mm (2pcs.)                                            |
| AX30385 | Diff Gasket 16x25x0.5mm (2pcs)                                 |
| AX30392 | Bevel Gear Set (38/13)                                         |
| AX30394 | 20T Drive Gear                                                 |
| AX30408 | Input Shaft 5x29mm (2pcs)                                      |
| AX30413 | Slipper spring 8.5x12 165 lbs/in - Black (2pcs)                |
| AX30420 | Solid Axle Dogbone 6x74mm (2pcs)                               |
| AX30421 | Straight Axle 6x104.50mm (2pcs)                                |
| AX30427 | Axial Narrow 12mm Aluminum Hub - Black (4pcs)                  |
| AX30435 | Steel Outdrive Shaft Set (2pcs)                                |
| AX30450 | Flange Pipe 3x4.5x5.5 (4pcs)                                   |
| AX30483 | AX10 Scorpion Radio Plate                                      |
| AX30485 | AX10 Scorpion Servo Plate                                      |
| AX30491 | AX10 RTR Motor Plate                                           |
| AX30499 | Transmission Spacer 5x6.9x4.8mm - Grey (2pcs)                  |
| AX30500 | Heavy Duty Locker (2pcs)                                       |
| AX30502 | SCX10 Chasis Rail Set (2pcs)                                   |
| AX30724 | Pinion Gear 32P 13T (3mm shaft)                                |
| AX31026 | Slipper Plate Washer 33x5x1.5mm (2pcs)                         |
| AX31027 | Spur Gear 32P 56T                                              |
| AX31028 | Pin 2.0x11mm (6pcs)                                            |
| AX31068 | Slipper Pad 32.8x15.2x1mm (2pcs)                               |
| AX31073 | M3x4x15mm Hex Socket Button Head Shoulder Screw - Black (6pcs) |
| AX31114 | WB8-HD Driveshaft                                              |
| AX31144 | AE-5 Waterproof Forward/Reverse ESC w/ Drag Brake              |
| AX31145 | Spring 12.5x60mm 2.63 lbs/in - Medium (Grey) (2pcs)            |
| AX31148 | WB8-HD Driveshaft Coupler Set                                  |
| AX31149 | Slipper Drive Gear Shaft 5x54.50mm                             |
| AX80002 | Diff Case -Small                                               |
| AX80003 | Solid Axle Set                                                 |
| AX80004 | Hub Set                                                        |
| AX80006 | Servo Set                                                      |
| AX80009 | Transmission Set                                               |
| AX80010 | Gear Set                                                       |
| AX80012 | C Hub Carrier Set                                              |
| AX80017 | Steering Link Parts Tree                                       |
| AX80018 | Hardware Parts Tree                                            |
| AX80020 | Plastic Rear Axle Lock-out (2pcs)                              |
| AX80025 | SCX10 Shock Hoops Parts Tree                                   |
| AX80026 | SCX10 Frame Brace Set                                          |
| AX80027 | SCX10 Battery Tray Holder                                      |
| AX80028 | SCX10 Radio Box Parts Tree                                     |
| AX80029 | Shock Cap Parts Tree                                           |
| AX80030 | 61-90 Schock Body Set                                          |
| AX80031 | Body Mount Parts Tree                                          |
| AX80032 | Shock Parts                                                    |
| AX80041 | 1/10th Scale Rock Rails Set (2pcs)                             |
| AX80043 | SCX10 RTR Links Parts Tree                                     |
| AX80078 | Transmission Spur Gear Cover                                   |
| AX80085 | Universal Mount 5 Bucket Light Bar (Black)                     |
| AX80086 | Light Bar Lenses (Clear) (5pcs)                                |
| AX80115 | Light Bar Lens Grills (Axial, PIAA, Un-Marked)                 |
| AX80125 | SCX10 Poison Spyder JK Brawler Lite Front Bumper               |
| AX80129 | Roll Cage Top                                                  |
| AX80130 | Roll Cage Sides                                                |
| AX80131 | Helmet Set                                                     |
| AX8079  | Axial Hub Cover Set - Black (4pcs)                             |
| AXA0109 | M3x10mm Oversized Flat Hex Socket (Black) (10pcs)              |
| AXA0113 | M3x6mm Hex Socket Button Head (Black) (10pcs)                  |
| AXA013  | M2x6 mm Cap Head (Black) (10pcs)                               |
| AXA015  | M2x10mm Cap Head (Black) (10pcs)                               |

### Part # Description

|         |                                                          |
|---------|----------------------------------------------------------|
| AXA0286 | Screw Shaft M4x2.5x12mm (6pcs)                           |
| AXA0414 | M2.6x10mm Hex Socket Tapping Flat Head (Black) (10pcs)   |
| AXA0424 | M2.6x10mm Hex Socket Tapping Button Head (Black) (10pcs) |
| AXA083  | M3x6mm Cap Head (Black) (10pcs)                          |
| AXA086  | M3x12mm Cap Head (Black) (10 pcs)                        |
| AXA087  | M3x16mm Cap Head (Black) (10pcs)                         |
| AXA088  | M3x20mm Cap Head (Black) (10pcs)                         |
| AXA089  | M3x25mm Cap Head (Black) (10pcs)                         |
| AXA1045 | M4 Nylon Lock Nut (Black) (10pcs)                        |
| AXA1053 | M3 Nylon Locking Hex Nut (Black) (10pcs)                 |
| AXA1059 | 6mm Body clip (Black) (10pcs)                            |
| AXA1070 | Washer 3x6x0.5 (10pcs)                                   |
| AXA1163 | O-Ring 7x1mm (10pcs)                                     |
| AXA117  | M3x15mm Hex Socket Button Head (Black) (10pcs)           |
| AXA1179 | O-Ring 2.5x1.5mm (10pcs)                                 |
| AXA119  | M3x20mm Hex Socket Button Head (Black) (10pcs)           |
| AXA121  | M3x30mm Hex Socket Button Head (Black) (10pcs)           |
| AXA1218 | Bearing 5x10x4mm (2pcs)                                  |
| AXA1221 | Bearing 5x11x4mm (2pcs)                                  |
| AXA1225 | Bearing 8x16x5mm (2pcs)                                  |
| AXA1230 | Bearing 10x15x4mm                                        |
| AXA1358 | Shock Damper 3x7x8 (10pcs)                               |
| AXA1392 | E2 e-clip (10pcs)                                        |
| AXA1393 | E2.5 e-clip (10pcs)                                      |
| AXA1417 | 5x6mm Spacer - Grey (6pcs)                               |
| AXA144  | M3x8mm Hex Socket Flat Head (Black) (10pcs)              |
| AXA176  | Screw Shaft M3x2.5x12mm (10pcs)                          |
| AXA180  | M3x3mm Set Screw (Black) (10pcs)                         |
| AXA291  | M4x4mm Set Screw (Black) (6pcs.)                         |
| AXA433  | M3x6mm Hex Socket Tapping Button Head - Black (10pcs)    |
| AXA434  | M3x8mm Hex Socket Tapping Button Head (Black) (10pcs)    |
| AXA435  | M3x10mm Hex Socket Tapping Button Head (Black) (10pcs)   |
| AXA436  | M3x12mm Hex Socket Tapping Button Head (Black) (10pcs)   |
| AXA438  | M3x18mm Hex Socket Tapping Button Head (Black) (10pcs)   |
| AXA440  | M3x25mm Hex Socket Tapping Button Head (Black) (10pcs)   |
| AXA463  | M3x6mm Hex Socket Tapping Flat Head (Black) (10pcs)      |
| AXA464  | M3x8mm Hex Socket Tapping Flat Head (Black) (10pcs)      |
| AXA465  | M3x10mm Hex Socket Tapping Flat Head (Black) (10pcs)     |
| AXA466  | M3x12mm Hex Socket Tapping Flat Head (Black) (10pcs)     |
| AXA471  | M3x30mm Hex Socket Tapping Flat Head (Black) (10pcs)     |

### Option Parts

|         |                                                                        |
|---------|------------------------------------------------------------------------|
| AX04032 | AX10 Ridgecrest Body - .040" (Clear)                                   |
| AX04033 | 2012 Jeep Wrangler Unlimited Rubicon™ Body - .040" (Clear) - Body Only |
| AX04034 | 2012 Jeep Wrangler Unlimited Rubicon™ Roof - .040" (Clear)             |
| AX04035 | 2012 Jeep Wrangler Unlimited Rubicon™ Body - .040" (Clear) - Complete  |
| AX04038 | Jeep® Wrangler Rock Racer Body - .040" (Clear) - Body Only             |
| AX12016 | 1.9 Ripsaw Tires - R35 Compound (2pcs)                                 |
| AX24003 | 20T Electric Motor                                                     |
| AX24007 | Axial 55T Electric Motor                                               |
| AX24010 | Brushless 2900KV Electric Motor                                        |
| AX24251 | Axial NVS - Night Visions System                                       |
| AX24252 | Axial Double LED Light String (White LED)                              |
| AX24253 | Axial Double LED Light String (Red LED)                                |
| AX24254 | Axial Double LED Light String (Orange LED)                             |
| AX24255 | Axial Single LED Light String (White LED)                              |
| AX24256 | Axial 5 LED Light String (White LED)                                   |
| AX24257 | Simple LED Controller w/LED lights (4 white and 2 Red)                 |
| AX24258 | 4 LED Light String (White LED)                                         |
| AX24259 | Axial AE-2 Forward/Reverse ESC w/ Drag Brake                           |
| AX24260 | AE-3 Vanguard ESC                                                      |
| AX30031 | Antenna                                                                |
| AX30090 | Axial 61-90mm Aluminum Shock Set - 7mm Piston (2pcs)                   |
| AX30103 | Icon 61-90mm Aluminum Shock Set - 7mm piston (2pcs)                    |
| AX30114 | Axial Hard Anodized Aluminum Shock Reservoir (2pcs)                    |
| AX30115 | Axial Hard Anodized Aluminum Pre-load collar (2pcs)                    |
| AX30117 | Axial Hard Anodized Aluminum Shock Body 10x38mm (2pcs)                 |
| AX30130 | Icon Clear Anodized Aluminum Shock Body 10x38mm (2pcs)                 |

## Option Parts

| Part #   | Description                                                       | Part #   | Description                                                            |
|----------|-------------------------------------------------------------------|----------|------------------------------------------------------------------------|
| AX30131  | Icon Clear Anodized Aluminum Shock Reservoir (2pcs)               | AX4010   | Axial Dingo Truck Body - .040" uncut (Clear)                           |
| AX30132  | Machined Shock Piston 7mm - 1.5x3 (4pcs)                          | AX4010R  | Axial Dingo Truck Body - .040" uncut (Clear) - Body Only               |
| AX30200  | Spring 12.5x20mm 3.6 lbs/in - Super Soft (Red) - (2pcs)           | AX4025   | Axial Trail Honcho Truck Body - .040" uncut (Clear) w/Molded Rear Cage |
| AX30201  | Spring 12.5x20mm 4.32 lbs/in - Soft (White) - (2pcs)              | AX4025R  | Axial Trail Honcho Truck Body - .040" uncut (Clear) - Body Only        |
| AX30202  | Spring 12.5x20mm 5.44 lbs/in - Medium (Green) - (2pcs)            | AX80037  | Interior Details Parts Tree - Black                                    |
| AX30203  | Spring 12.5x20mm 6.53 lbs/in - Firm (Yellow) - (2pcs)             | AX80038  | Exterior Detail Parts Tree - Black                                     |
| AX30204  | Spring 12.5x20mm 7.95 lbs/in - Super Firm (Blue) - (2pcs)         | AX80039A | 1/10th Scale Front Plate Bumper Set                                    |
| AX30205  | Spring 12.5x40mm 2.7 lbs/in - Super Soft (Red) - (2pcs)           | AX80039B | 1/10th Scale Rear Plate Bumper Set                                     |
| AX30206  | Spring 12.5x40mm 3.6 lbs/in - Soft (White) - (2pcs)               | AX80040  | 1/10th Scale Fender Flare Set (2pcs)                                   |
| AX30207  | Spring 12.5x40mm 4.08 lbs/in - Medium (Green) - (2pcs)            | AX80044  | Axial SCX10 Tube Bumper Parts Tree                                     |
| AX30208  | Spring 12.5x40mm 5.44 lbs/in - Firm (Yellow) - (2pcs)             | AX80045  | Axial Light Bucket Set (Black)                                         |
| AX30209  | Spring 12.5x40mm 6.81 lbs/in - Super Firm (Blue) - (2pcs)         | AX80047  | Interior Details Parts Tree - Chrome                                   |
| AX30395  | Heavy Duty Bevel Gear Set - 38T/13T                               | AX80048  | Exterior Detail Parts Tree - Chrome                                    |
| AX30401  | Heavy Duty Bevel Gear Set - 36T/14T                               | AX80049  | Axial LED Lens Set - Yellow/Clear (4pcs)                               |
| AX30402  | Heavy Duty Bevel Gear Set - 43T/13T                               | AX80051  | Dig Transmission Case                                                  |
| AX30426  | Steering Upgrade Kit                                              | AX80068  | Dig Linkage Set                                                        |
| AX30437  | Dig Lockout Shaft                                                 | AX80126  | SCX10 Poison Spyder JK RockBrawler Rear Bumper and Tire Carrier        |
| AX30484  | Transmission Spacer                                               | AX8080   | Axial Hub Cover Set - Satin Chrome (4pcs)                              |
| AX30487  | AX10 Locked Transmission Set                                      | AX8087   | Axial 1.9 8 Hole Beadlocks - Black (2pcs)                              |
| AX30488  | AX10 Locked Axle Set                                              | AX8088   | Axial 1.9 8 Hole Beadlocks - Satin Chrome (2pcs)                       |
| AX30489  | Transmission Spacer 5x6.9x4.8mm                                   | AX8122   | Axial 1.9 Beadlock Ring - Grey (2pcs)                                  |
| AX30494  | Aluminum Rear Axle Lockout (2pcs)                                 | AX8127   | Axial 1.9 Rock Beadlock Ring - Grey (2pcs)                             |
| AX30495  | Aluminum C Hub Carrier - Black (2pcs)                             | AXA1046  | M4 Serrated Nylon Lock Nut (Blue) (4pcs)                               |
| AX30496  | Aluminum Knuckle - Black (2pcs)                                   | AXA1076  | Cap Head Washer M3x10mm (4pcs)                                         |
| AX30498  | Transmission Spacer - Grey                                        | AXA1101  | Cone Washer 3x6.9x2mm (6pcs)                                           |
| AX30516  | Threaded Aluminum Pipe 6x106mm - Grey (2 pcs.)                    | AXA1104  | Cone Washer 3x6.9x2mm - Orange (6pcs)                                  |
| AX30517  | Threaded Aluminum Pipe 6x33mm - Grey (2pcs.)                      | AXA1105  | Cone Washer 3x6.9x2mm - Grey (6pcs)                                    |
| AX30518  | Threaded Aluminum Pipe 6x98mm - Grey (2pcs.)                      | AXA1331  | Flanged Ball 3x5.8x7mm (6pcs)                                          |
| AX30547  | 1.9 Internal Wheel Weight Ring 43g/1.5oz (2pcs)                   | AXA1412  | 0.5x6mm Spacer - Grey (6pcs)                                           |
| AX30548  | 1.9 Internal Wheel Weight Insert 9g/0.33oz (4pcs) (for use with   | AXA1413  | 1x6mm Spacer - Grey (6pcs)                                             |
| AX30547) |                                                                   | AXA1414  | 2x6mm Spacer - Grey (6pcs)                                             |
| AX30549  | SCX10 TR Links Set - 11.4" (290mm) WB                             | AXA1415  | 3x6mm Spacer - Grey (6pcs)                                             |
| AX30550  | SCX10 TR Links Set - 12.3" (313mm) WB                             | AXA1416  | 4x6mm Spacer - Grey (6pcs)                                             |
| AX30569  | Pinion 48P 14T - Steel                                            | AXA1418  | 6x6mm Spacer - Grey (6pcs)                                             |
| AX30571  | Pinion 48P 13T - Steel                                            | AXA1419  | 7x10mm Post - Grey (2pcs)                                              |
| AX30572  | Pinion 48DP 14T                                                   | AXA1420  | 7x15mm Post - Grey (2pcs)                                              |
| AX30573  | Pinion 48P 15T - Steel                                            | AXA1421  | 7x20mm Post - Grey (2pcs)                                              |
| AX30578  | Pinion 48DP 20 T                                                  | AXA1422  | 7x25mm Post - Grey (2pcs)                                              |
| AX30665  | Spur 48DP 80T                                                     | AXA1423  | 7x30mm Post - Grey (2pcs)                                              |
| AX30672  | Spurs 48DP 87T                                                    | AXA1424  | 7x35mm Post - Grey (2pcs)                                              |
| AX30708  | AX10 Locked Transmission - Complete Metal Gear Set - Steel (3pcs) | AXA1425  | 7x40mm Post - Grey (2pcs)                                              |
| AX30709  | Universal 5 Bucket Light Bar Set                                  | AXA1426  | 7x45mm Post - Grey (2pcs)                                              |
| AX30793  | Dig Component Set                                                 | AXA1427  | 7x50mm Post - Grey (2pcs)                                              |
| AX30794  | WB8 Driveshaft Set (2pcs)                                         | AXA1428  | 7x55mm Post - Grey (2pcs)                                              |
| AX30834  | Aluminum Servo Horn 23T                                           | AXA1429  | 7x60mm Post - Grey (2pcs)                                              |
| AX30835  | Aluminum Servo Horn 24T                                           | AXA1430  | 7x65mm Post - Grey (2pcs)                                              |
| AX30836  | Aluminum Servo Horn 25T                                           | AXA1431  | 7x70mm Post - Grey (2pcs)                                              |
| AX30860  | Machined Motor Plate (Hard Anodized)                              |          |                                                                        |

## NOTES

# DON'T SETTLE FOR ***NORMAL BEHAVIOR***

©2013 Axial R/C, Inc. A subsidiary of Hobbico, Inc. All Rights Reserved.



**READY TO RUN**

**AX10™ DEADBOLT™ 1/10th SCALE  
ELECTRIC 4WD #AX90033**

OFFICIALLY LICENSED TECHNICAL PARTNERS:

**MAXXIS**

*RaceLine*  
wheels

**ICON**  
VEHICLE DYNAMICS

**DANA**  
GO

 **axial**®

[www.axialracing.com](http://www.axialracing.com)



# SCX10

## THE OFFICIAL TRUCK OF THE R.E.C.O.N. G6 CHALLENGE



AWCC 2011



### SCX10™ FEATURES:

- > SCALE LOOKS WITH METAL TO MATCH!!!
- > TRUE STEEL C-CHANNEL FRAME
- > SOLID AXLE DESIGN WITH HARDENED STEEL INNER AXLES FRONT AND BACK
- > TRUE RING AND PINION MECHANICAL DIFFERENTIALS
- > COIL OVER SHOCKS
- > STRONG 4X4 TRANSMISSION / TRANSFER CASE ALL-IN-ONE
- > FULL METAL BEARINGS IN AXLES AND TRANSMISSION - RUBBER SEALED FOR MAXIMUM PROTECTION

If you are looking for adventure, the RECON G6 Challenge™ is where it's at. RECON G6 Challenge™ events deliver excitement and push boundaries; always bringing the elements of what a real adventure should deliver - the unknown!

The coolest thing about participating in the G6 Challenge™ is that it is not about the podium, it's all about the finish. It's about the massive amount of drive time and persevering to survive the unknown-uncatched; and then sharing stories at the end of the day - "How in the heck did you clear TM-24 on the 100-course?" "Did you see that Bender-6X walk-it?!" "Did you get passed by the Swanson Swagger!?"

For adventure G6'ers, the rougher and less traveled, the better! It is the adventure of a lifetime for man and scale machine against the elements. The G6 is about battling the course with your comrades, work as an individual or help your fellow G6'ers to overcome the obstacles; survival is the name of the game!

In an adventure, chasing the unknown requires confidence. Confidence = reliability = SCX10™. The Axial SCX10™ - the official truck of the RECON G6 Challenge™!

Visit our blog and start the adventure!



### THE SCX10™ MODEL RANGE:



**AX90021**  
DINGO™  
KIT (UNASSEMBLED)



**AX90022**  
TRAIL HONCHO™  
RTR (READY-TO-RUN)



**AX90027**  
JEEP WRANGLER  
UNLIMITED RUBICON  
KIT (UNASSEMBLED)



**AX90028**  
JEEP WRANGLER  
UNLIMITED RUBICON  
RTR (READY-TO-RUN)

© 2013 Axial R/C Inc. A subsidiary of Hobbico, Inc.  
Jeep and the Jeep grille are registered trademarks of Chrysler Group LLC and are used under license. ©2013 Chrysler Group LLC.



[www.axialracing.com](http://www.axialracing.com)

OFFICIALLY LICENSED TECHNICAL PARTNERS:

**MAXXIS**®

**sparco**®

**PIAA**



**POISON SPYDER**  
C U S T O M S



**EXPLORE**

[facebook.com/axialinc](https://facebook.com/axialinc) | [twitter.com/axialrc](https://twitter.com/axialrc) | [youtube.com/axialvideos](https://youtube.com/axialvideos) | [flickr.com/axialrc](https://flickr.com/axialrc)



**8 GOODYEAR  
SUITE 125  
IRVINE, CA 92618**

AX90044-1001

[www.axialracing.com](http://www.axialracing.com)